

NF3000C-SAQ Series (RoHS认证产品)

三相三线式 480VAC

小型高衰减大电流型(中性点接地电源型)



UL1283 (file No.E102708)
EN60939-2 (file No.R50031207)

用途

IGBT变频器、AC伺服、NC控制器等

规格

Parts No.	Rated Current	Weight	Dimensions [mm]													fig
			A	B	C	D	E	F	G	H	J	K	L	M	N	
NF3080C-SAQ	80A	3Kg	260	245	230	189	145	120	90	80	61	12	6.5	M8	M5	fig1
NF3100C-SAQ	100A		285	270	255	216	171	170	100	105	89	67	6.5	M8	M8	fig2
NF3150C-SAQ	150A	5.5Kg	351	300	285	270	253	200	160	150	139	105	6.5	M10	M10	fig3
NF3200C-SAQ	200A															
NF3250C-SAQ	250A	7Kg	351	300	285	270	253	200	160	150	139	105	6.5	M10	M10	fig3
NF3300C-SAQ	300A															
Rated Voltage	480VAC max															
Leakage Current	250mA max/480VAC 60Hz By UL1283(接地端子接地时) 设置本EMI滤波器时, 请同时使用绝缘变压器。 在三相中性点接地电源中, 缺少一相时产生的泄漏电流。当无缺少相时不产生上述电流。															
Ambient temp.	-10 up to 50 Deg.C															

fig. 1 (80, 100A)

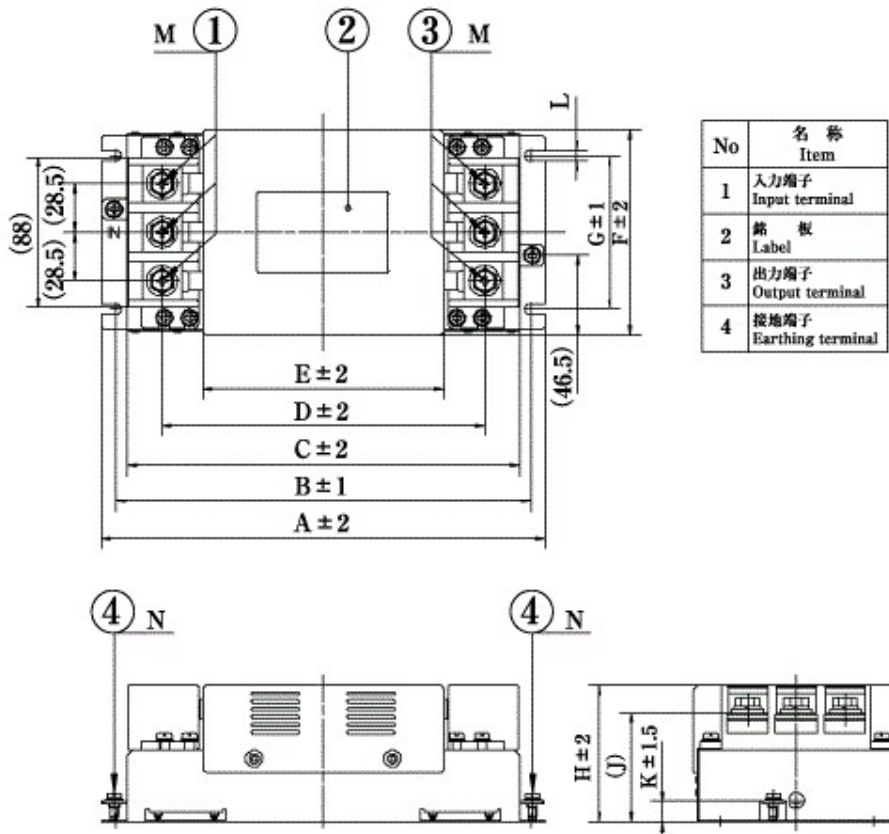


fig. 2 (150, 200A)



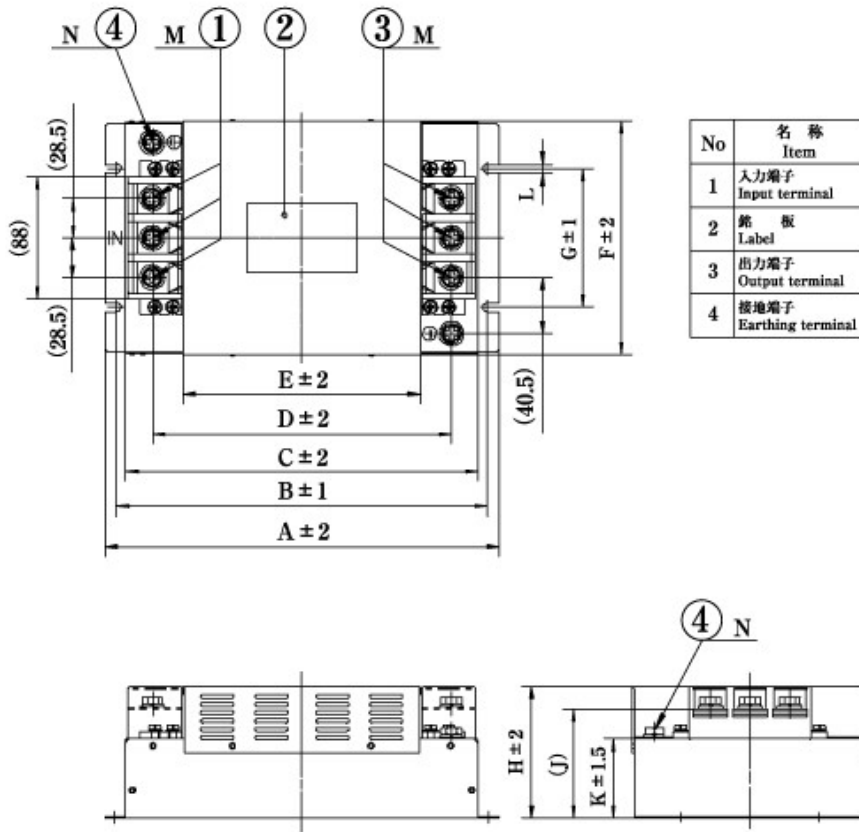


fig. 3 (250, 300A)

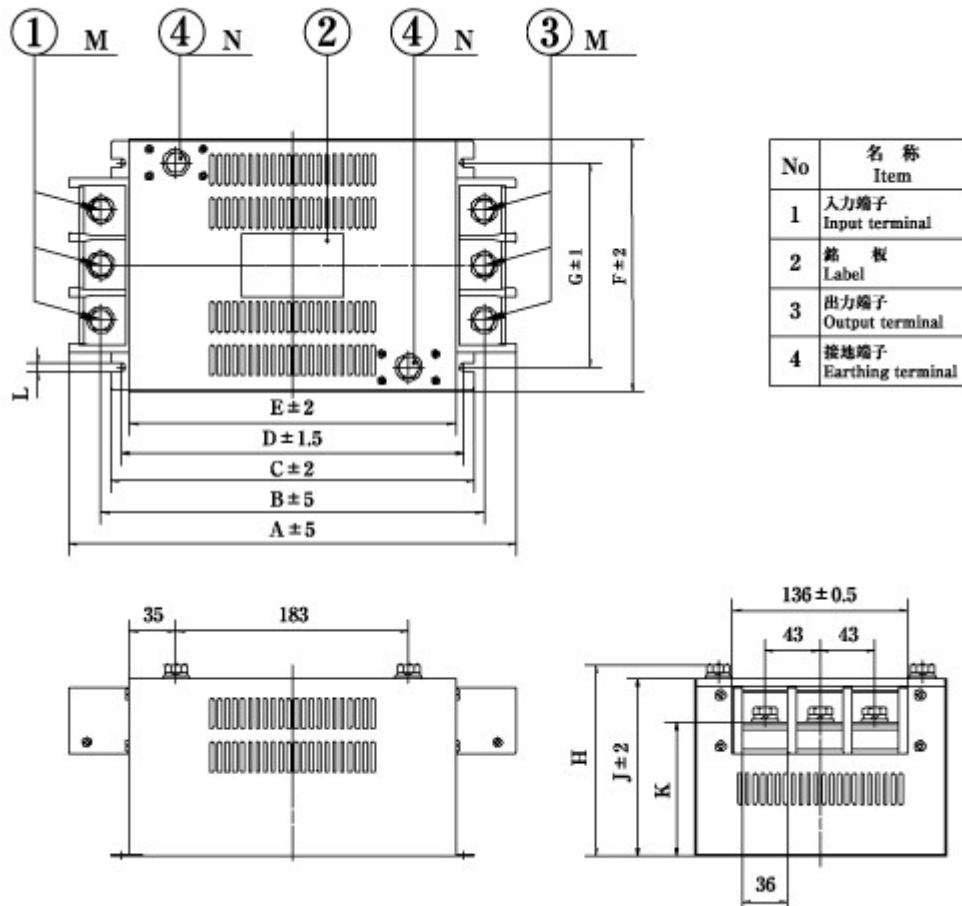

代表特性 (80A)

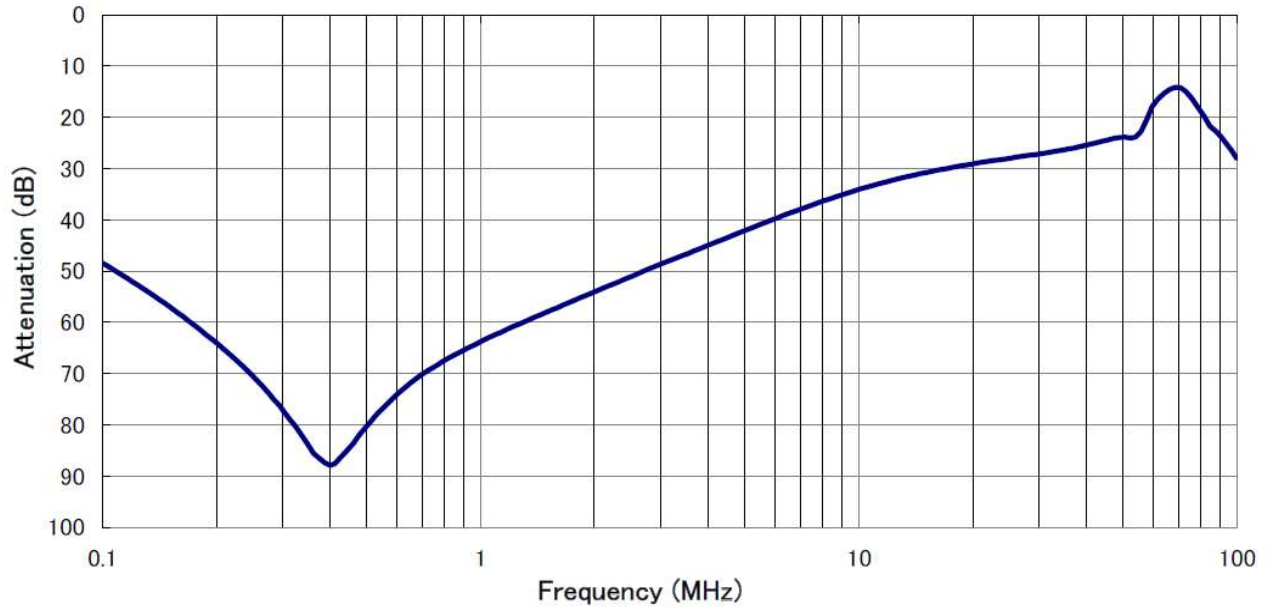

代表特性 (100A)

