

# HF3000C-UQA Series (RoHS认证产品)

三相三线式 480VAC

高衰减大电流型(低泄漏电流型)



150A产品 外观



UL1283 (file No.E102708)  
EN60939-2 (file No.R50031225)

## 用途




IGBT变频器、AC伺服、NC控制器等

## 规格

Part No.	Rated Current	Weight	
HF3010C-UQA	10A	2.2kg	fig1
HF3020C-UQA	20A	2.8kg	
HF3030C-UQA	30A	3.3kg	
HF3040C-UQA	40A	4kg	
HF3050C-UQA	50A	4kg	
HF3060C-UQA	60A	4.5kg	fig2
HF3080C-UQA	80A	9kg	
HF3100C-UQA	100A	11kg	fig3
HF3150C-UQA	150A	14kg	fig4
HF3200C-UQA	200A	20kg	
HF3250C-UQA	250A	21kg	
HF3300C-UQA	300A	22kg	fig5
HF3400C-UQA	400A	33kg	
Rated Voltage	480VAC max		
Leakage Current	10mA max / 400VAC 50Hz By UL1283		
Ambient temp.	-20 up to 50 Deg.C		

fig.1 (10-60A)

Model Name	Size (mm)										
	A	B	C	D	E	F	G	H	J	K	L
HF3010C-UQA	186	171	156	136	98	84	73	95	φ4.5×6	M4	M4
HF3020C-UQA	236	221	206	184	105	90	76	122	φ5.5×7	M5	M5
HF3030C-UQA											
HF3040C-UQA	256	241	226	204	115	100	86	127	φ5.5×7	M5	M5
HF3050C-UQA											
HF3060C-UQA											

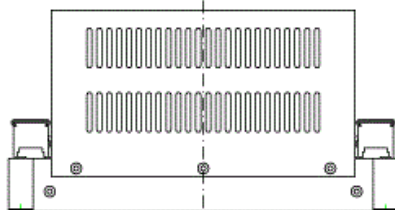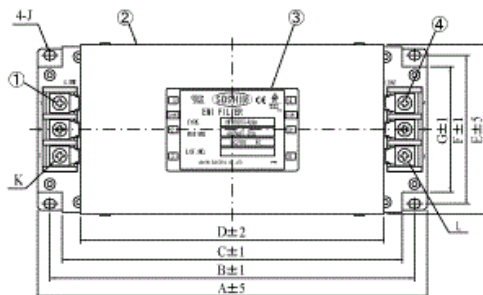

No	Item
1	Input terminal
2	Resin case
3	Label
4	Output terminal

fig.2 (80, 100A)

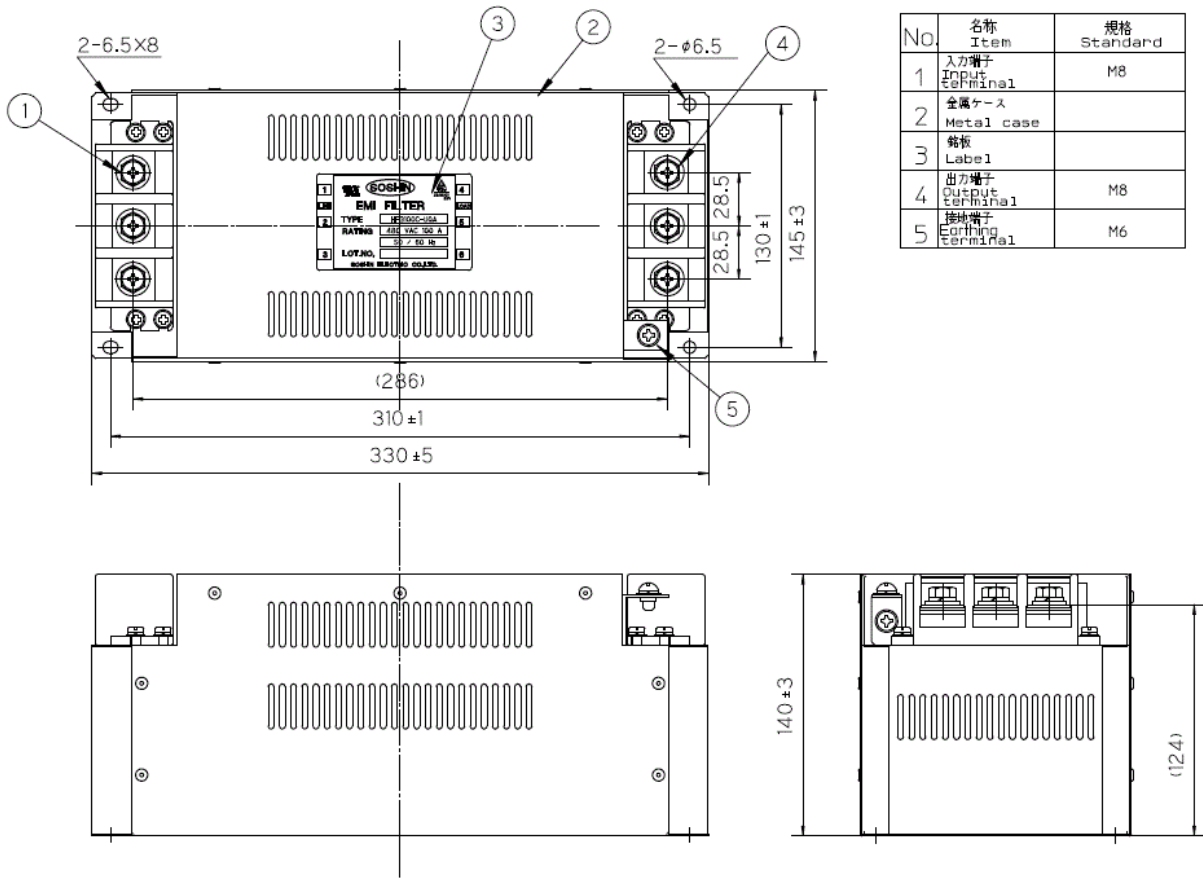


fig. 3 (150A)


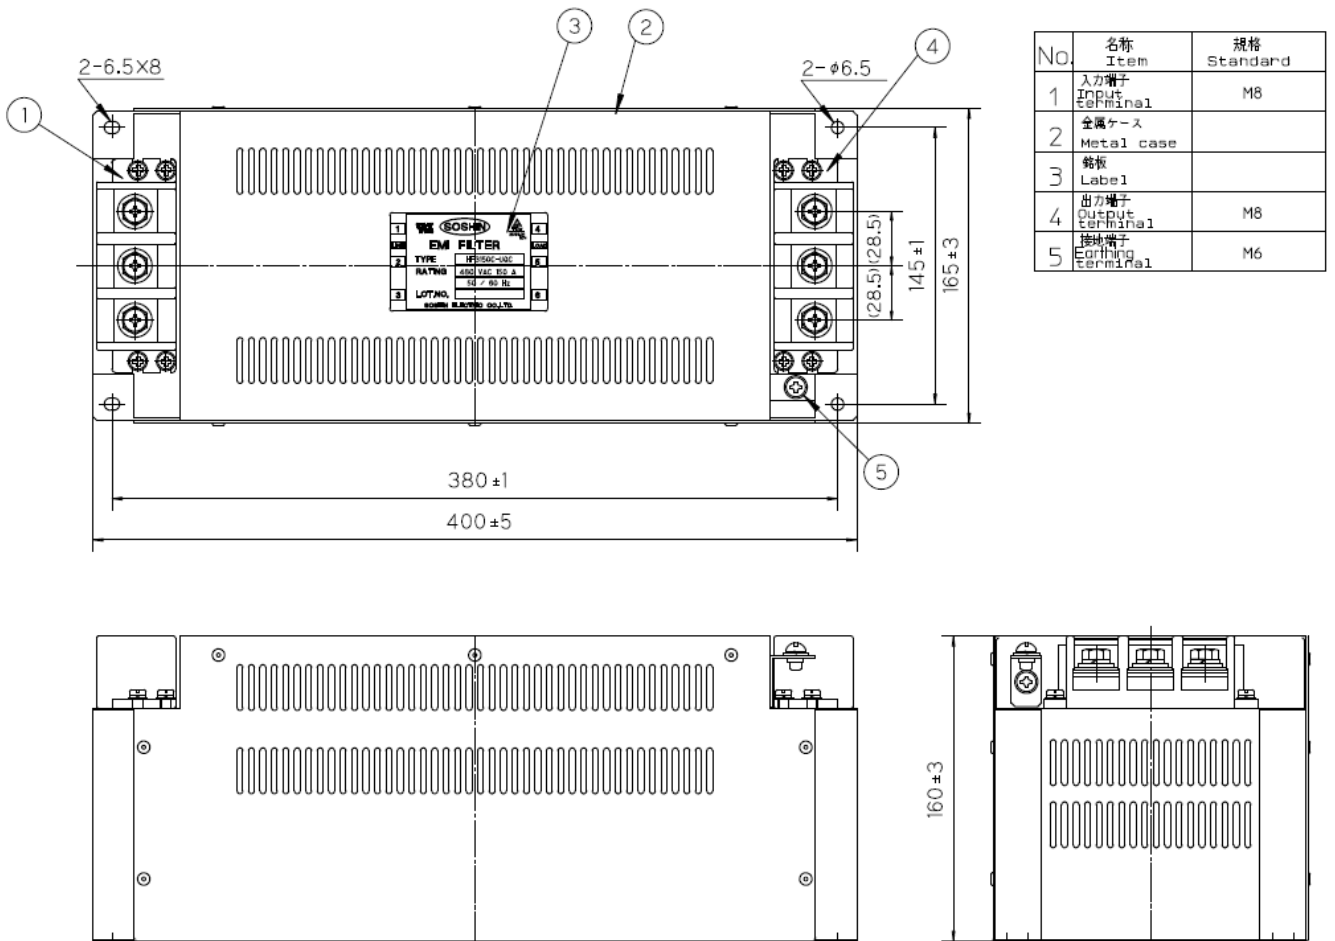


fig. 4 (200, 250, 300A)

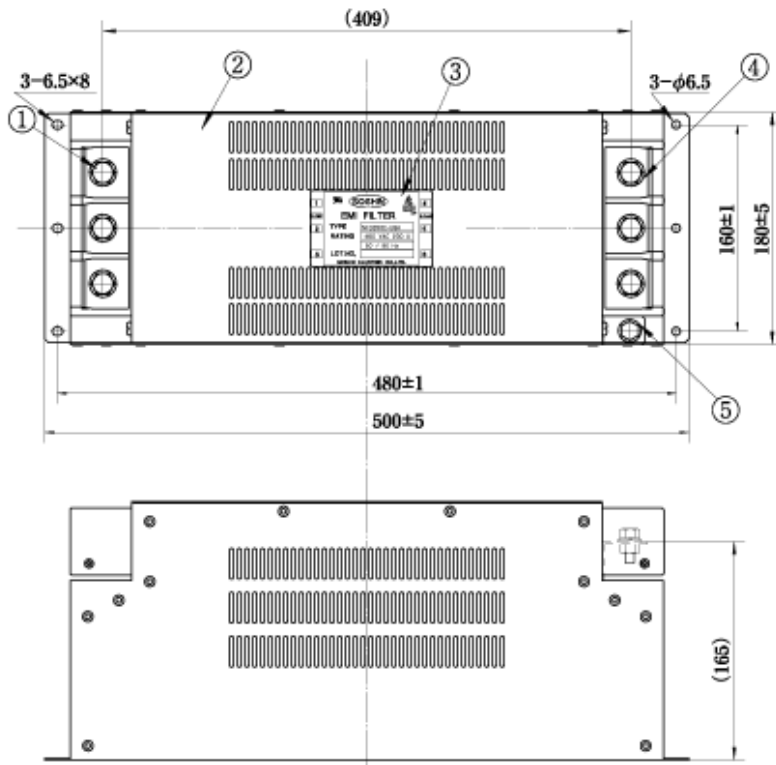

No	Item	Notes
①	Input terminal	M10
②	Metal case	
③	Label	
④	Output terminal	M10
⑤	Earthing terminal	M8







fig. 5 (400A)

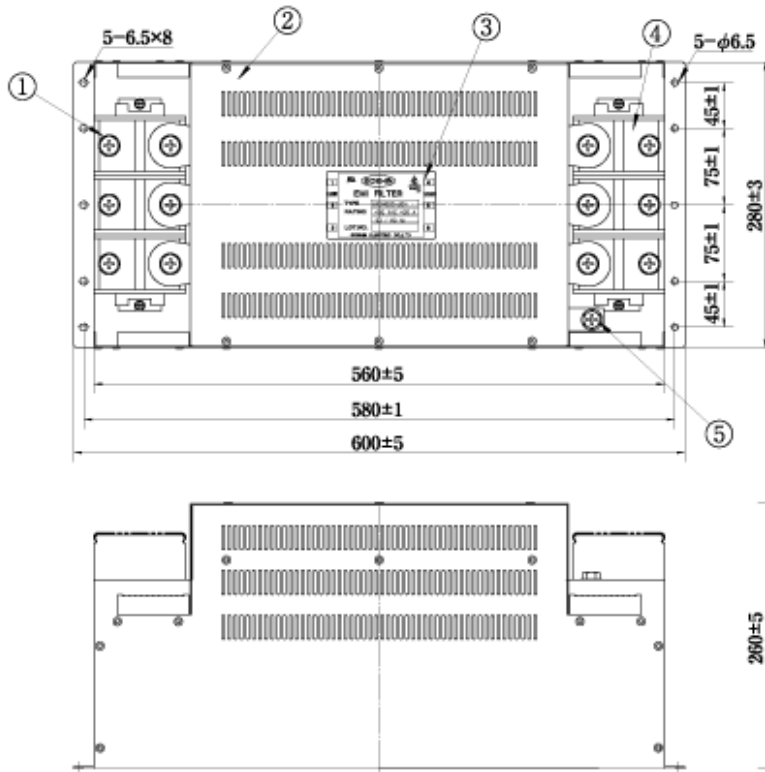

No	Item	Notes
①	Input terminal	M12
②	Metal case	
③	Label	
④	Output terminal	M12
⑤	Earthing terminal	M10

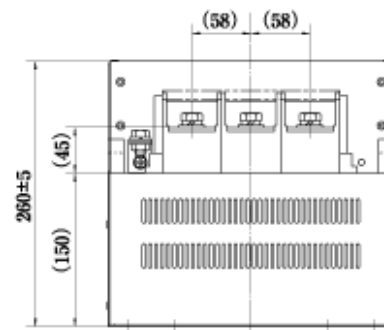

## 衰减特性

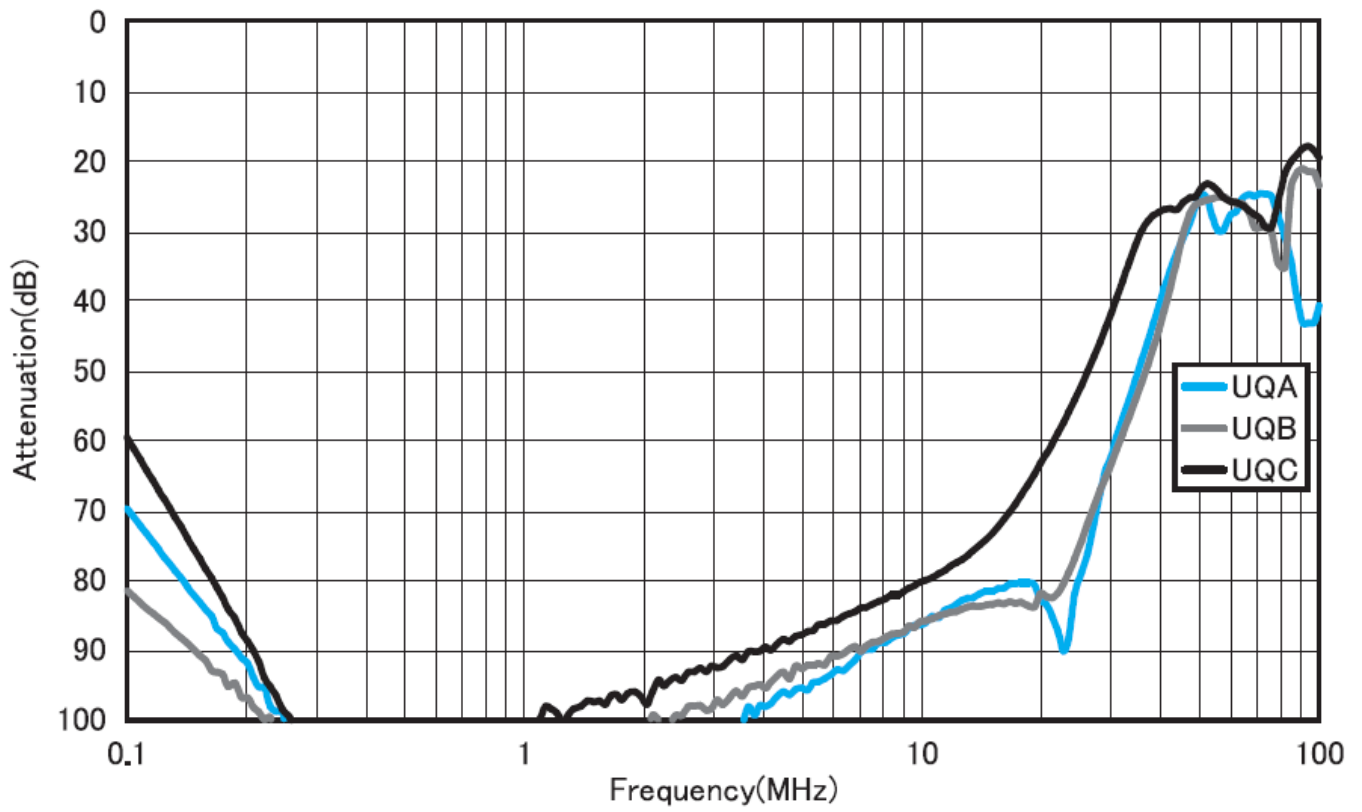

## 电路图

