

NF3000C-SVB Series (RoHS认证产品)

三相三线式 500VAC

书状高衰减型(中性点接地电源型)



100A产品 外观



UL1283/CSA C22.2 No8(C-UL) (file No.E102708)  
EN60939-2 (file No.R50147282)



用途

工作机械、通用变频器以及AC伺服等

规格

| Parts No.       | Rated Current                   | Weight |      |
|-----------------|---------------------------------|--------|------|
| NF3010C-SVB     | 10A                             | 0.6Kg  | fig1 |
| NF3020C-SVB     | 20A                             | 0.7Kg  |      |
| NF3030C-SVB     | 30A                             | 0.7Kg  |      |
| NF3040C-SVB     | 40A                             | 1.1Kg  | fig2 |
| NF3050C-SVB     | 50A                             | 1.1Kg  |      |
| NF3060C-SVB     | 60A                             | 1.1Kg  |      |
| NF3080C-SVB     | 80A                             | 2.6Kg  | fig3 |
| NF3100C-SVB     | 100A                            | 2.7Kg  |      |
| NF3150C-SVB     | 150A                            | 4.3Kg  | fig4 |
| NF3180C-SVB     | 180A                            | 4.3Kg  |      |
| NF3200C-SVB     | 200A                            | 6.9Kg  | fig5 |
| NF3250C-SVB     | 250A                            | 8.1Kg  |      |
| NF3300C-SVB     | 300A                            | 8.1Kg  |      |
| Rated Voltage   | 530VAC max                      |        |      |
| Leakage Current | 150mA max/500VAC 60Hz By UL1283 |        |      |
| Ambient temp.   | -20 up to 50 Deg.C              |        |      |

fig.1 (10-30A)

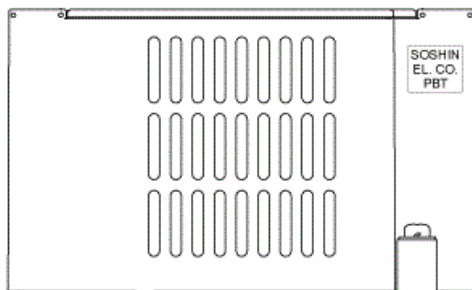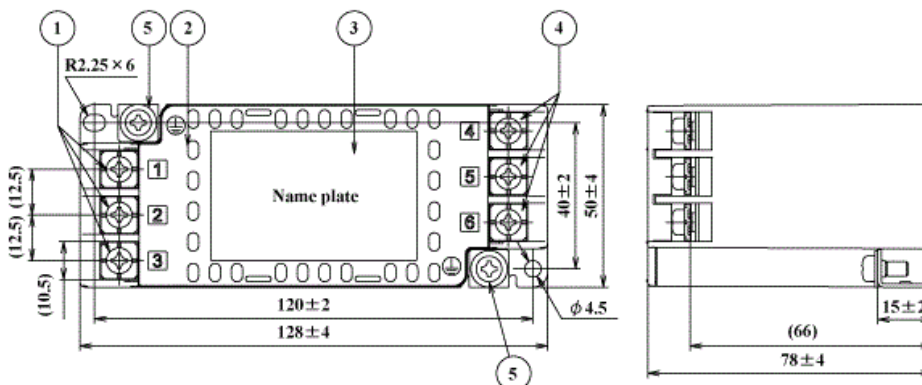

| No | Part name       | Note |
|----|-----------------|------|
| 1  | Input terminal  | M4   |
| 2  | Case            | PBT  |
| 3  | Name plate      |      |
| 4  | Output terminal | M4   |
| 5  | Earth terminal  | M4   |

fig.2 (40-60A)

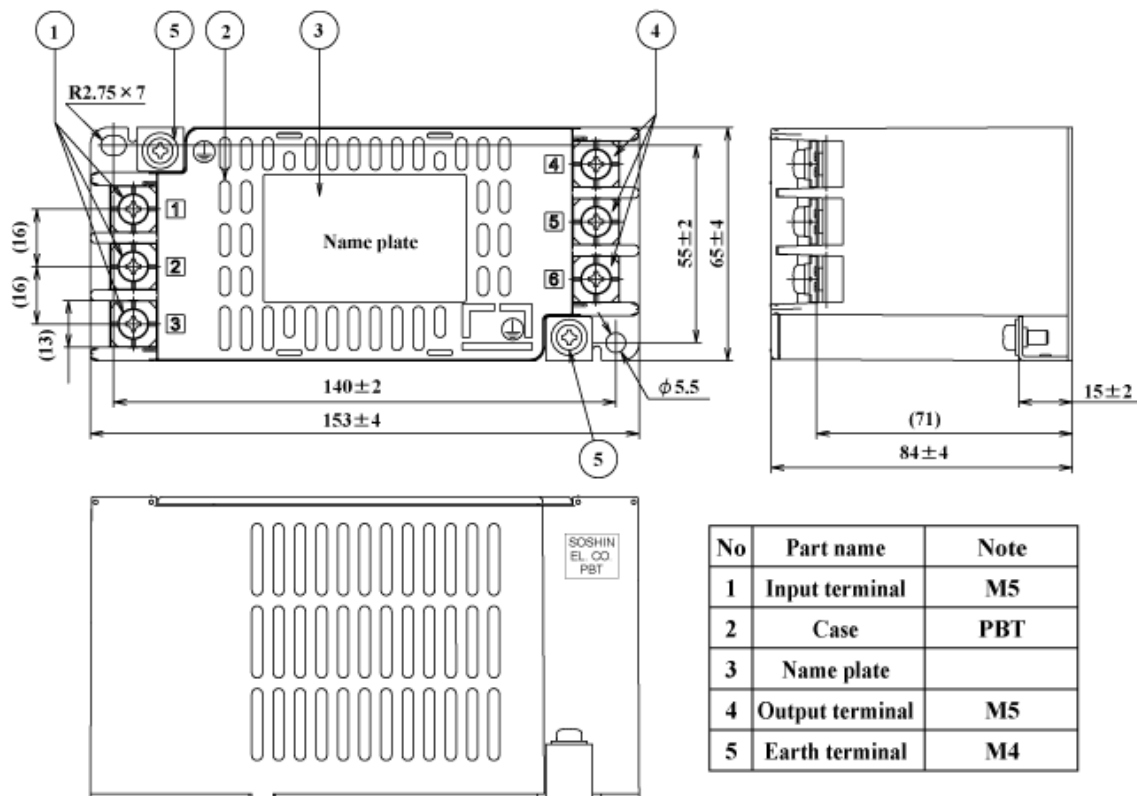


fig.3 (80A, 100A)

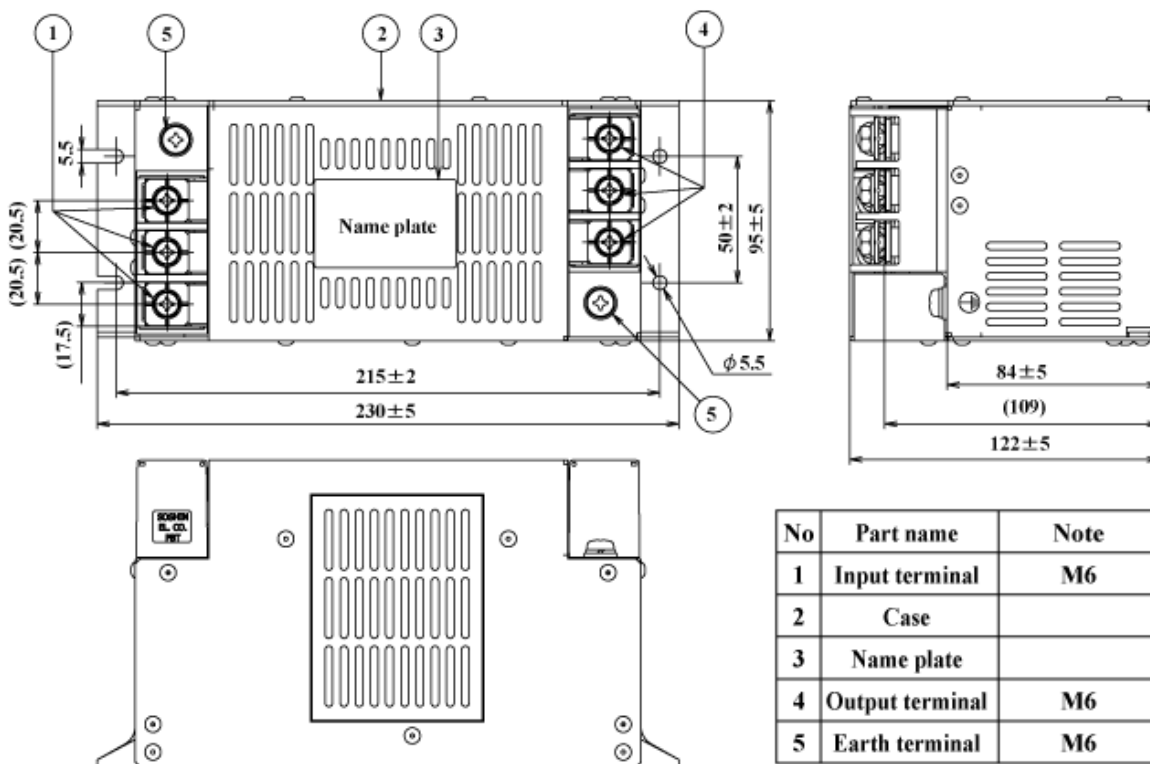


fig.4 (150A, 180A)



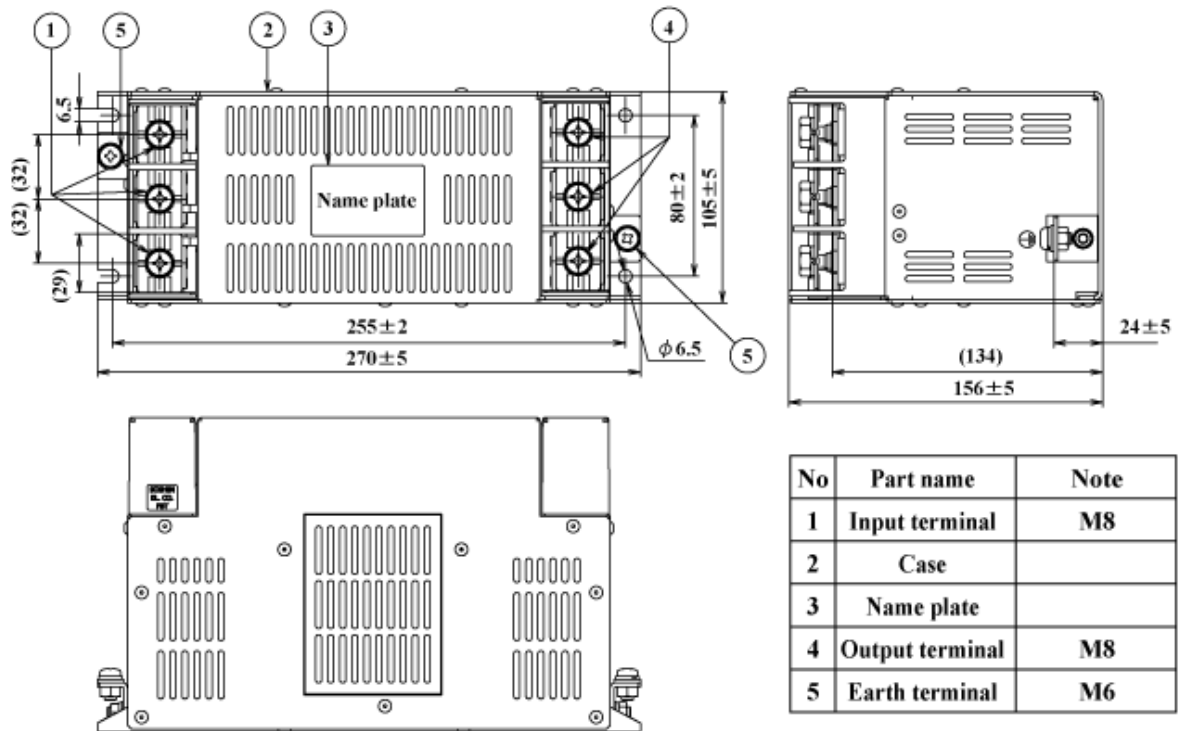


fig.5 (200-300A)

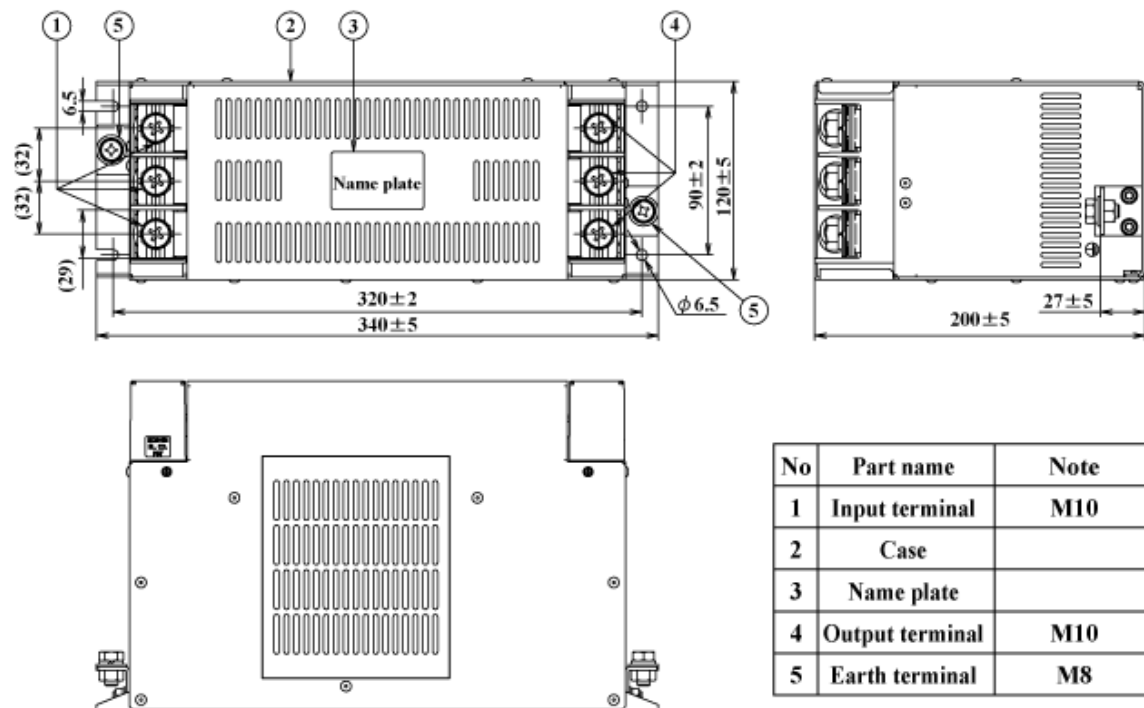

# 代表特性 (NF3030C-SVB)

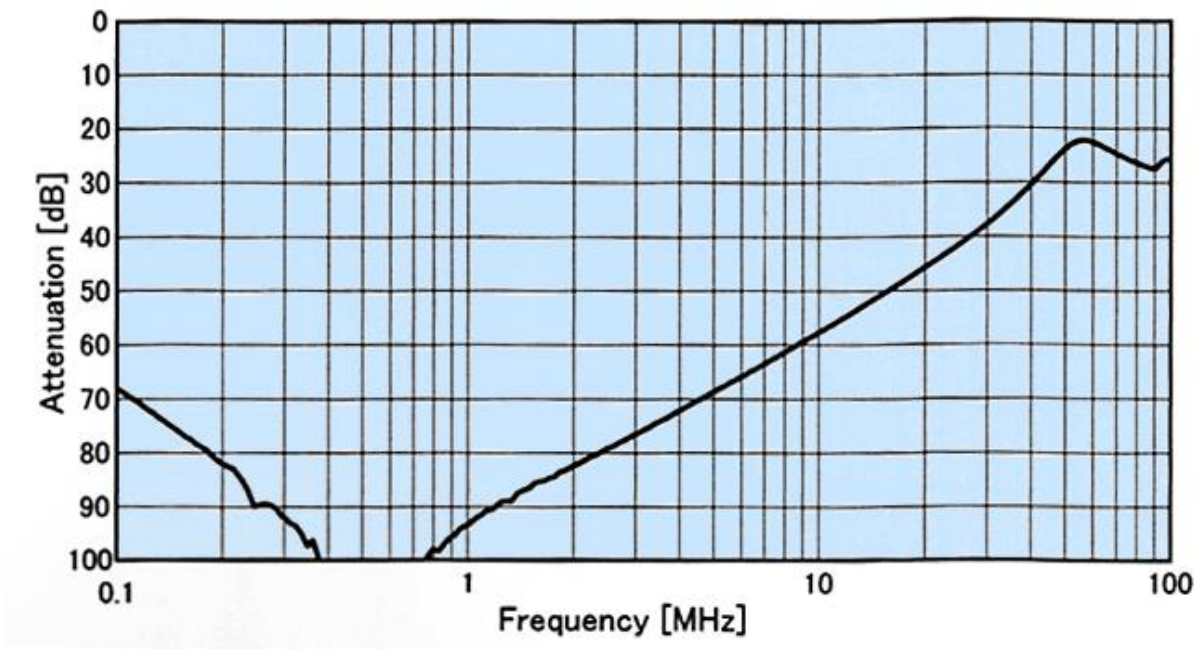

# 电路图

