

HF3000C-SZL Series (RoHS Compliant)

3-phase 3-line 500VAC



EXCELLENT MAGNETIC SATURATION RESISTANCE
AND SPACE SAVING BOOK TYPE



UL1283/CSA C22.2 No8(C-UL) (file No.E102708)
EN60939-2 (file No.R50147299)

用途

AC servo, Semiconductor equipment, Machining tool, General-purpose inverter and servo

仕様

Part No.	Rated Current	Weight	Dimensions [mm]											
			A	B	C	D	E	F	G	H	J	K	L	
HF3010C-SZL	10A	0.9kg	220	210	66	55	78	R2.2 5×6	φ4.5	M4	M4	10.5	12.5	fig.1
HF3020C-SZL	20A	1.3kg												
HF3030C-SZL	30A													
HF3040C-SZL	40A	2.0kg	270	260	80	70	84	R2.7 5×7	φ5.5	M5	M4	13.0	16.0	
HF3050C-SZL	50A													
HF3060C-SZL	60A	2.1kg												
HF3080C-SZL	80A	5.4kg												fig.2
HF3100C-SZL	100A	5.8kg												fig.3
HF3150C-SZL	150A	9.0kg												fig.4
HF3200C-SZL	200A	11.0kg												
HF3250C-SZL	250A	12.0kg												
HF3300C-SZL	300A	13.0kg												
Rated Voltage		530VAC max												
Leakage Current		7mA max 400VAC 50Hz By UL1283												
Ambient temp.		-20 up to 50 Deg.C												

fig.1 (10~60A)

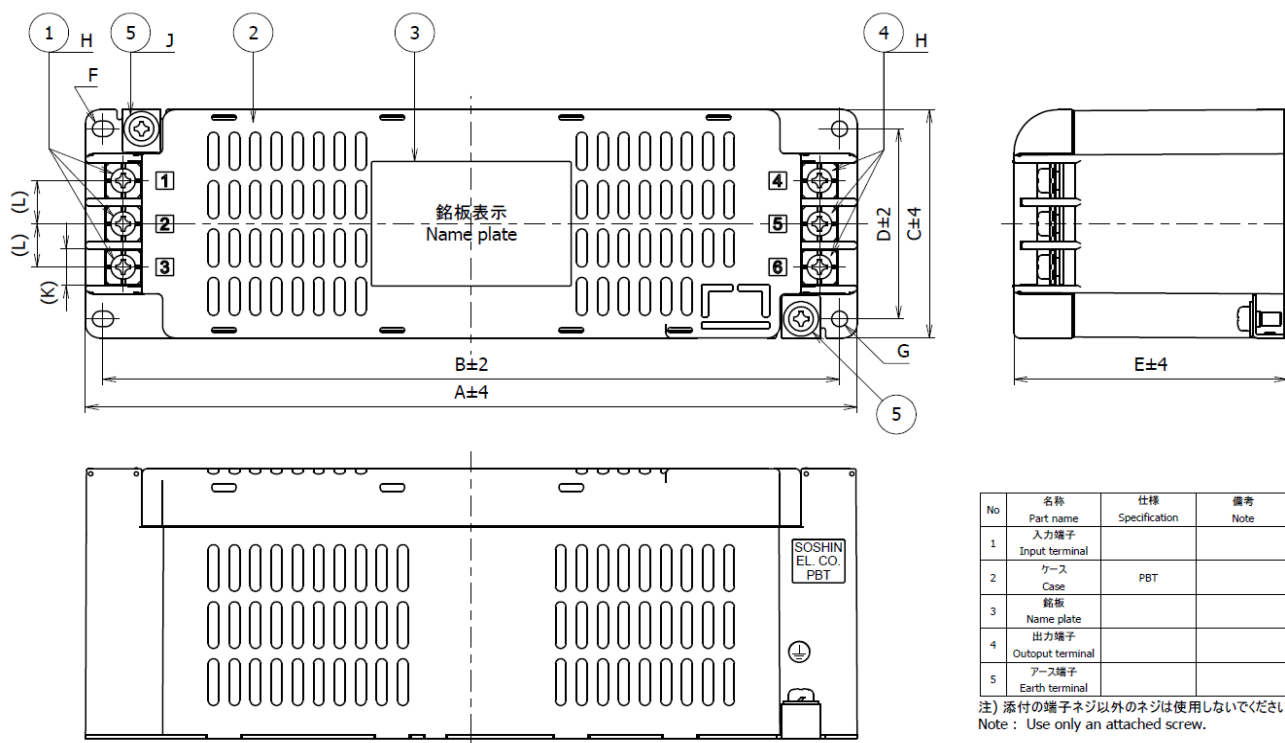


fig.2 (80、100A)

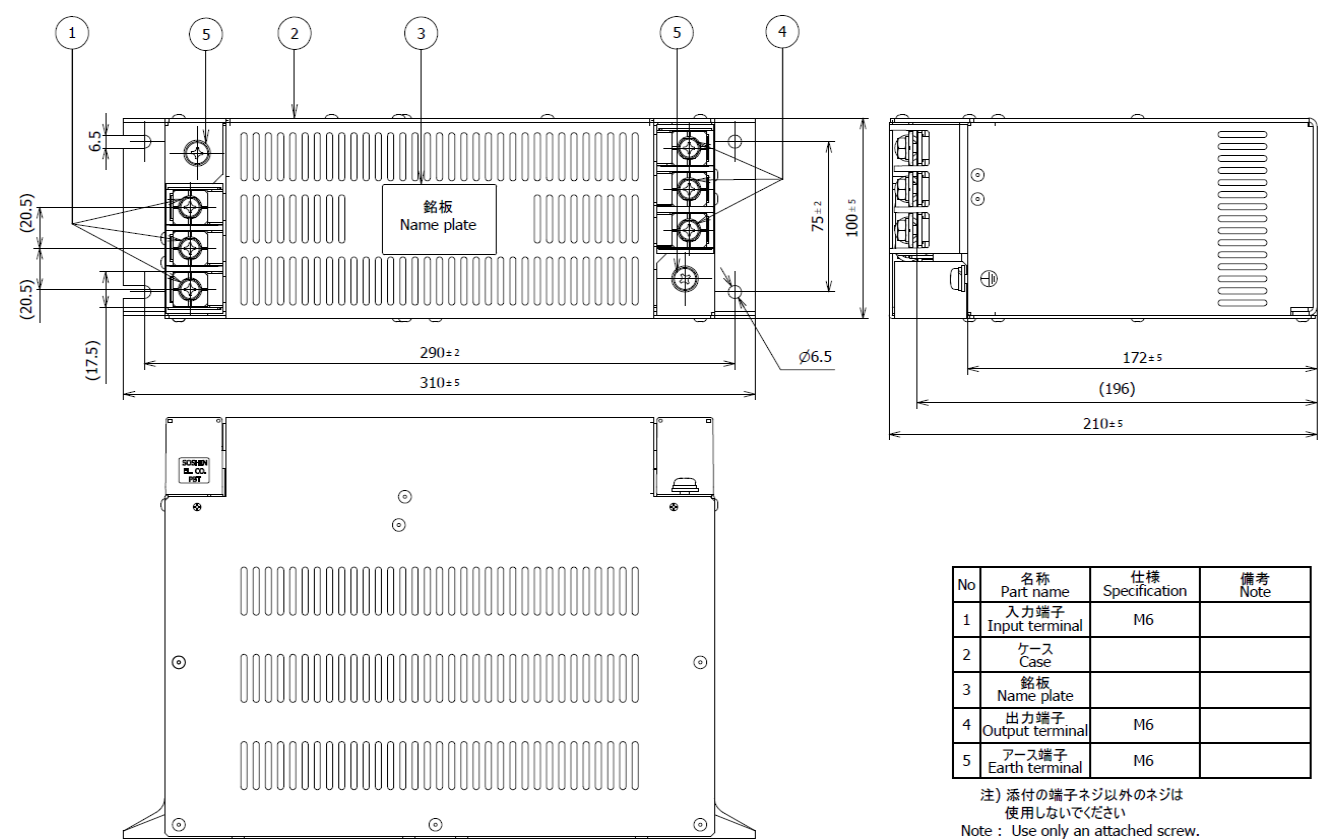


fig. 3 (150A)



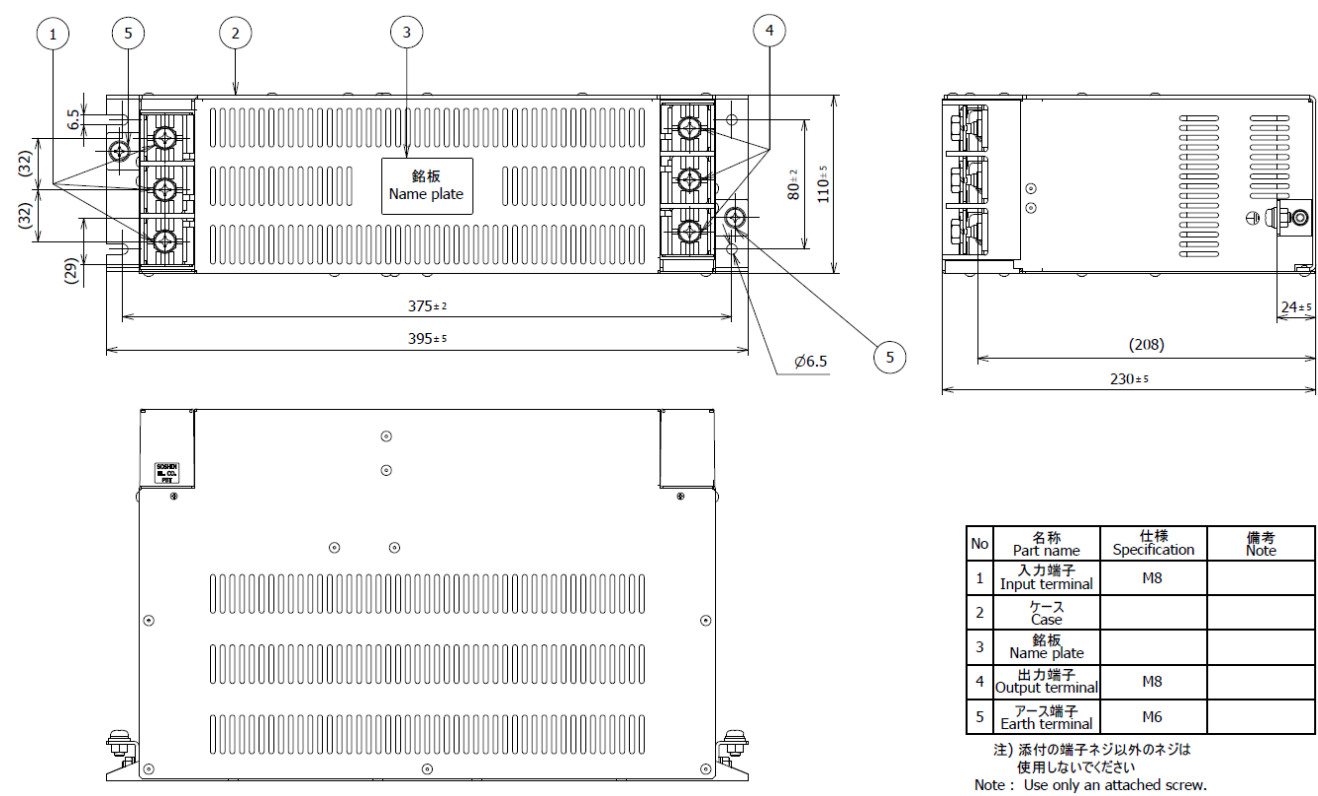


fig. 4 (200~300A)

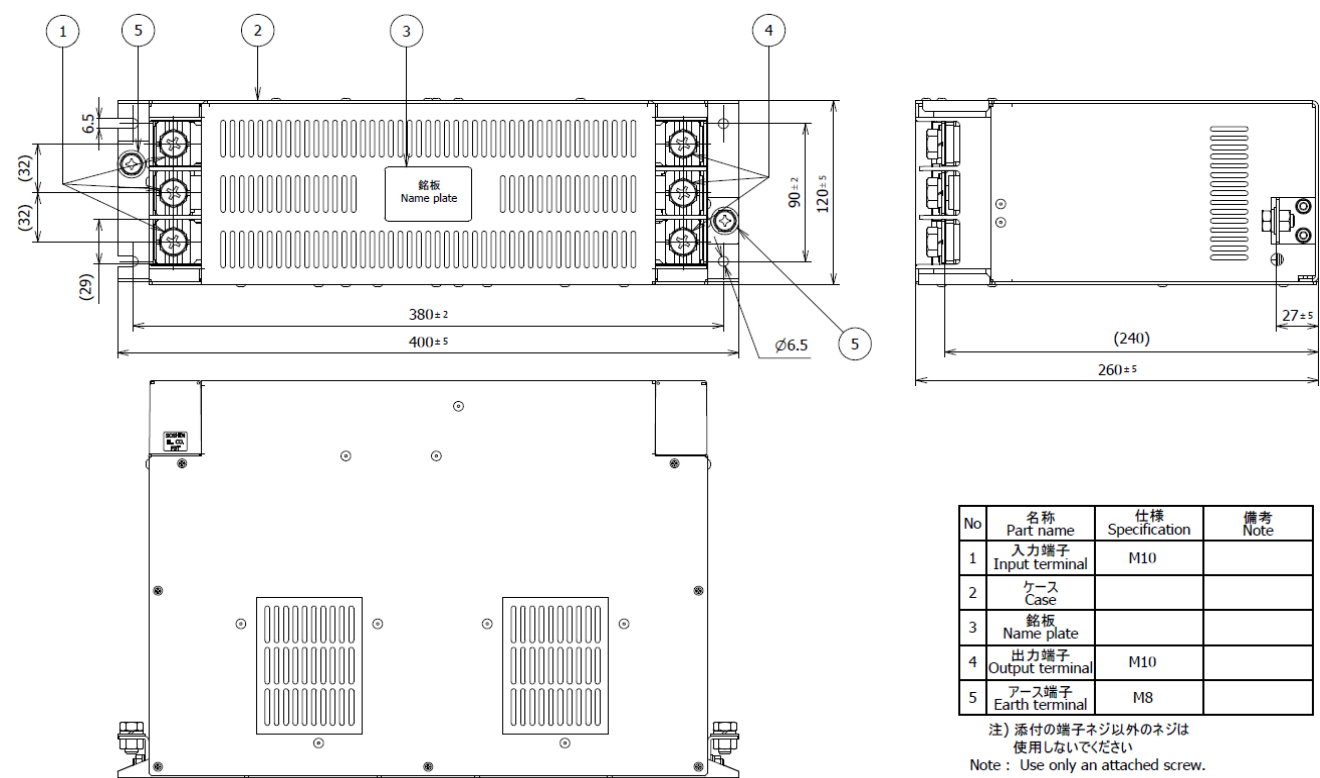

Characteristics (Typical) (150A)

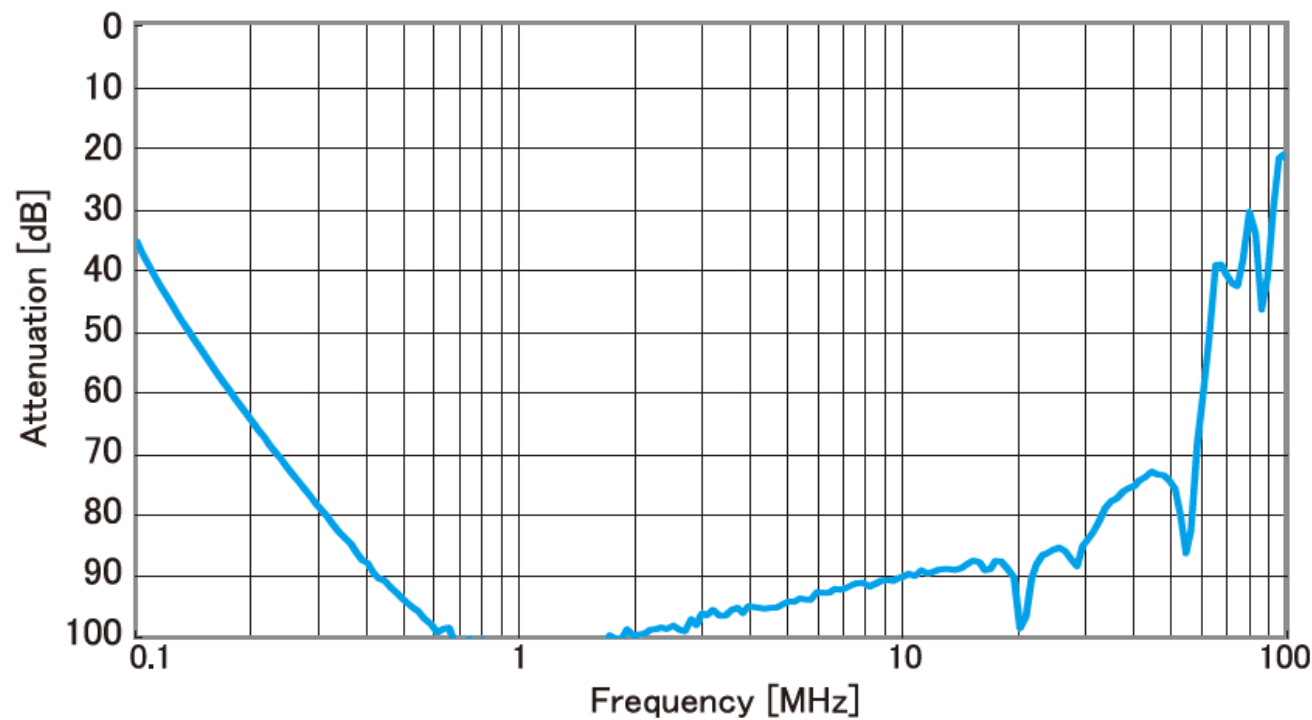

Circuit Diagram

