

# NF3000A-RQ2 Series (RoHS Compliant)

3-phase 3-lin 250VAC

Available 80-300A, Standard of 3-phase EMI filters



UL1283 (file NO.E102708)  
EN60939-2 (file No.R50031314)

## Applications

UPS, General purpose inverter power supply

## Specifications

Part No.	Rated Current	Weight	Dimensions [mm]														
			A	B	C	D	E	F	G	H	J	K	L	M	N	P	
NF3080A-RQ2	80A	3.6Kg	217	200	185	170	120	90	44	115	85	20	5.5x7	dia.5.5	M6	M4	fig1
NF3100A-RQ2	100A	4.6Kg	254	230	215	200	150	120	57	115	80	30	6.5x8	dia.6.5	M8	M6	
NF3150A-RQ2	150A	9Kg	314	300	280	260	200	170	57	130	90	35	6.5x8	dia.6.5	M8	M6	
NF3200A-RQ2	200A	16Kg	450	430	338	100	190	230	7	180	133	M10	M8				fig2
NF3250A-RQ2	250A	16Kg	450	430	338	100	190	230	7	180	133	M10	M8				
NF3300A-RQ2	300A	23Kg	500	475	400		160	200	12	180	133	M10	M8				
Rated Voltage	250VAC																
Leakage Current	1.5mA																

fig.1 (80,100, 150A)



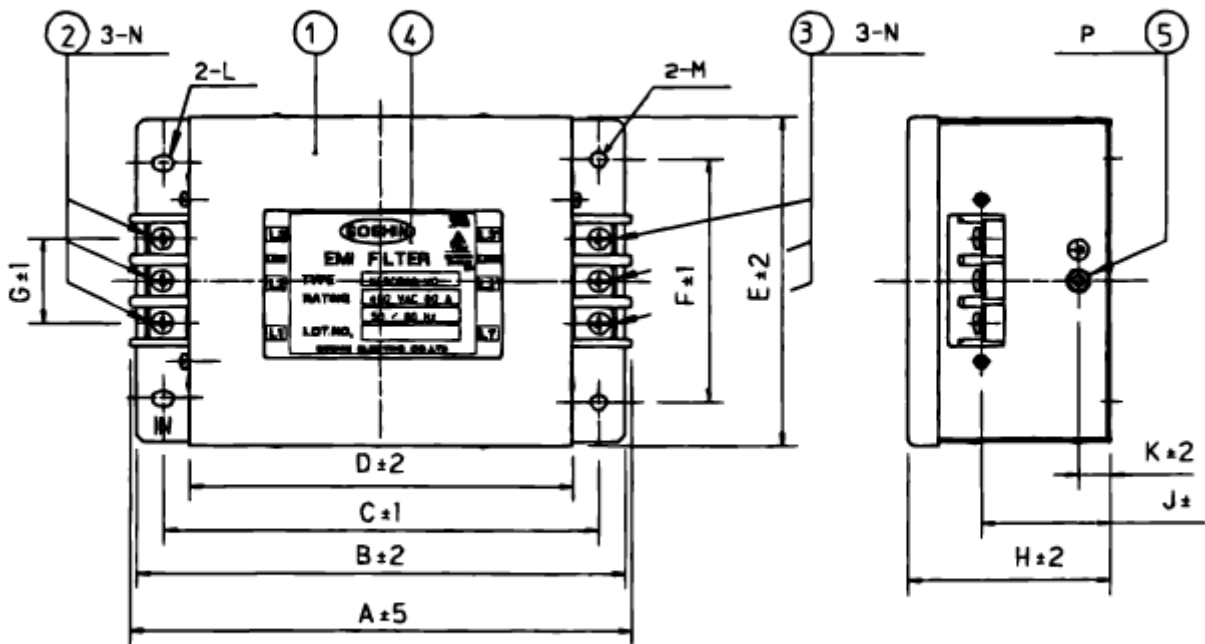


fig.2 (200, 250, 300A)

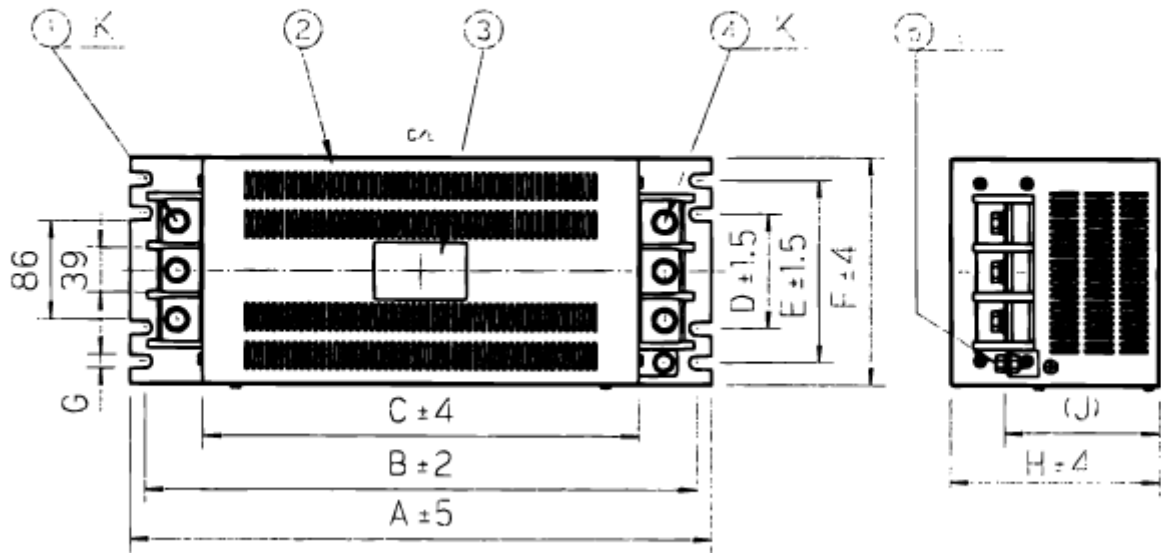

Characteristics (Typical)

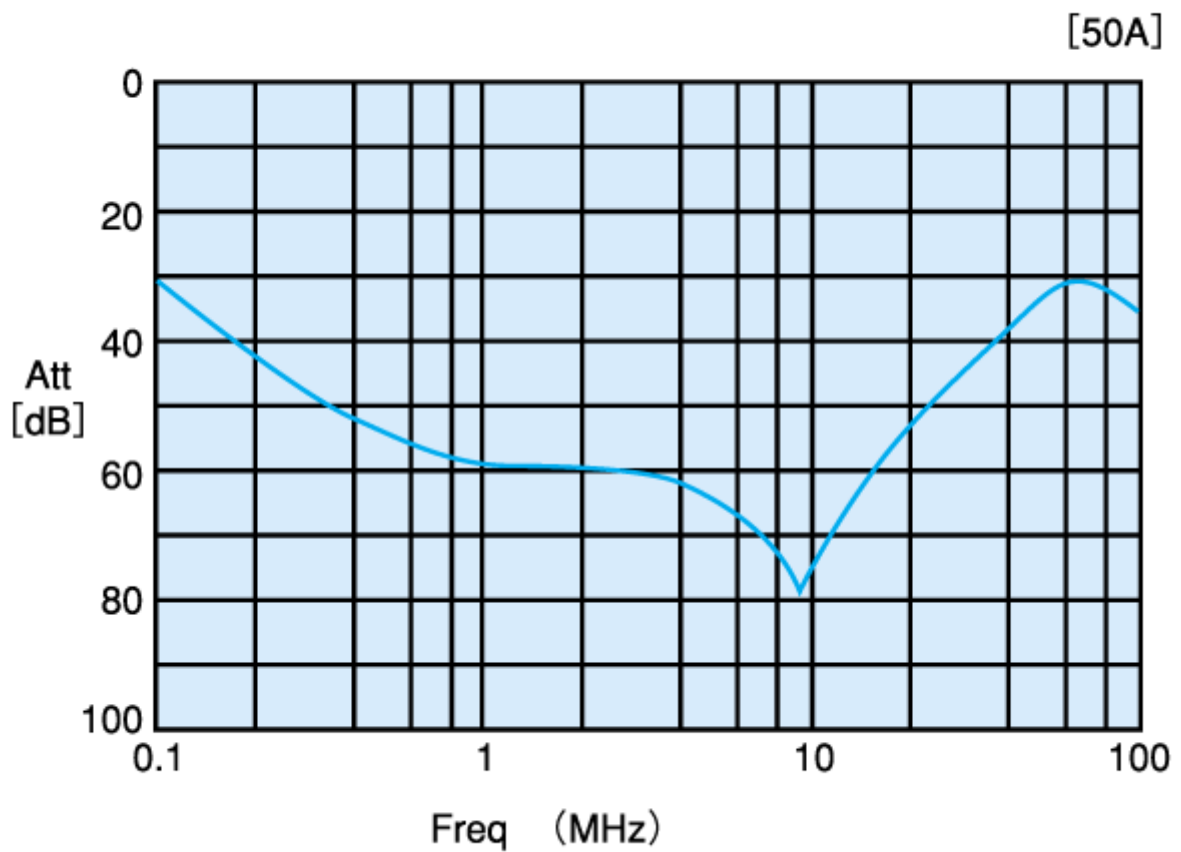

# Circuit Diagram

