


HF3000C-SZB Series (RoHS Compliant)

3-phase 3-line 500VAC

Wide band & High attenuation

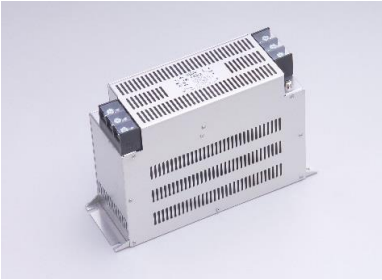

100A

 UL1283/CSA C22.2 No8(C-UL) (file No.E102708)
 EN60939-2 (file No.R50147299)

Applications

Machining Center, General-purpose Inverter, AC Servo

Specifications

Part No.	Rated Current	Weight	Dimensions [mm]											
			A	B	C	D	E	F	G	H	J	K	L	
HF3010C-SZB	10A	0.9kg	220	210	66	55	78	R2.2 5×6	φ4.5	M4	M4	10.5	12.5	fig.1
HF3020C-SZB	20A	1.3kg												
HF3030C-SZB	30A	2.0kg												
HF3040C-SZB	40A	2.0kg	270	260	80	70	84	R2.7 5×7	φ5.5	M5	M4	13.0	16.0	fig.2
HF3050C-SZB	50A	2.1kg												
HF3060C-SZB	60A	5.4kg												
HF3080C-SZB	80A	5.8kg												fig.3
HF3100C-SZB	100A	9.0kg												fig.4
HF3150C-SZB	150A	11.0kg												
HF3200C-SZB	200A	12.0kg												
HF3250C-SZB	250A	13.0kg												
HF3300C-SZB	300A	13.0kg												
Rated Voltage	530VAC max													
Leakage Current	7mA max 400VAC 50Hz By UL1283													
Ambient temp.	-20 up to 50 Deg.C													

fig.1 (10~60A)

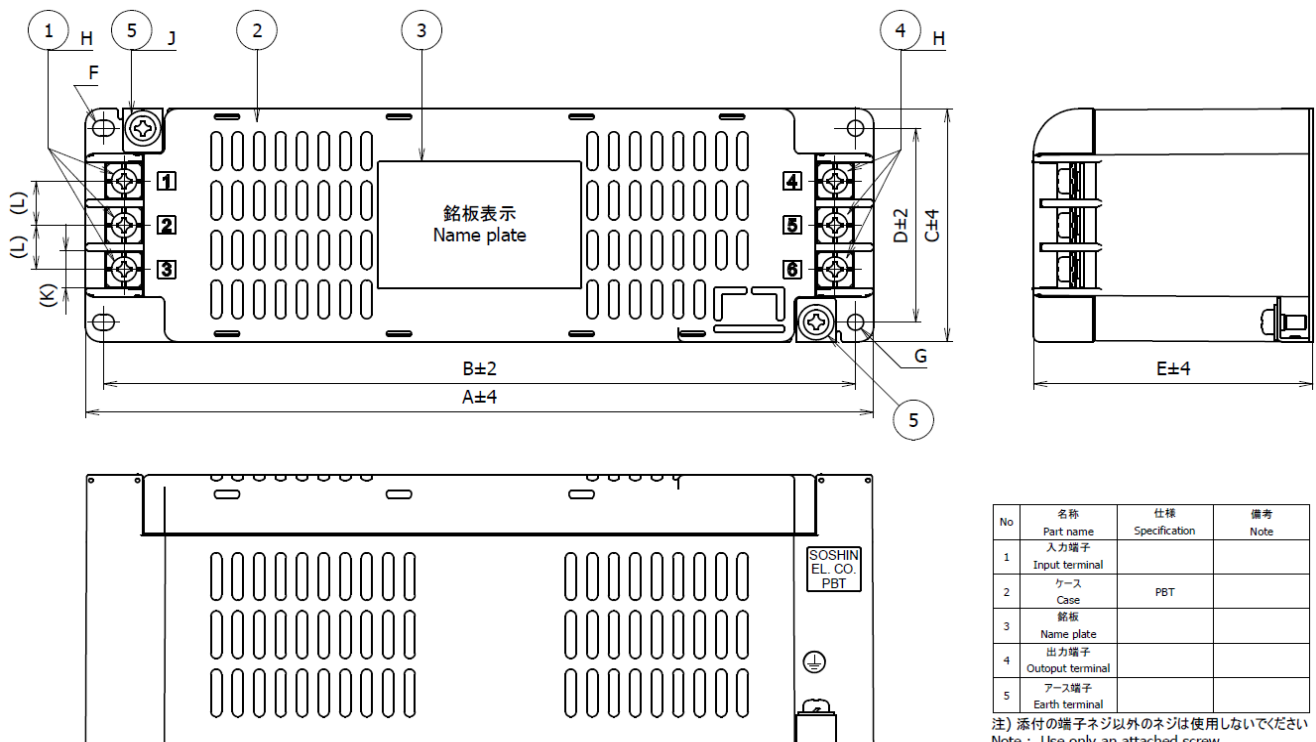


fig.2 (80、100A)

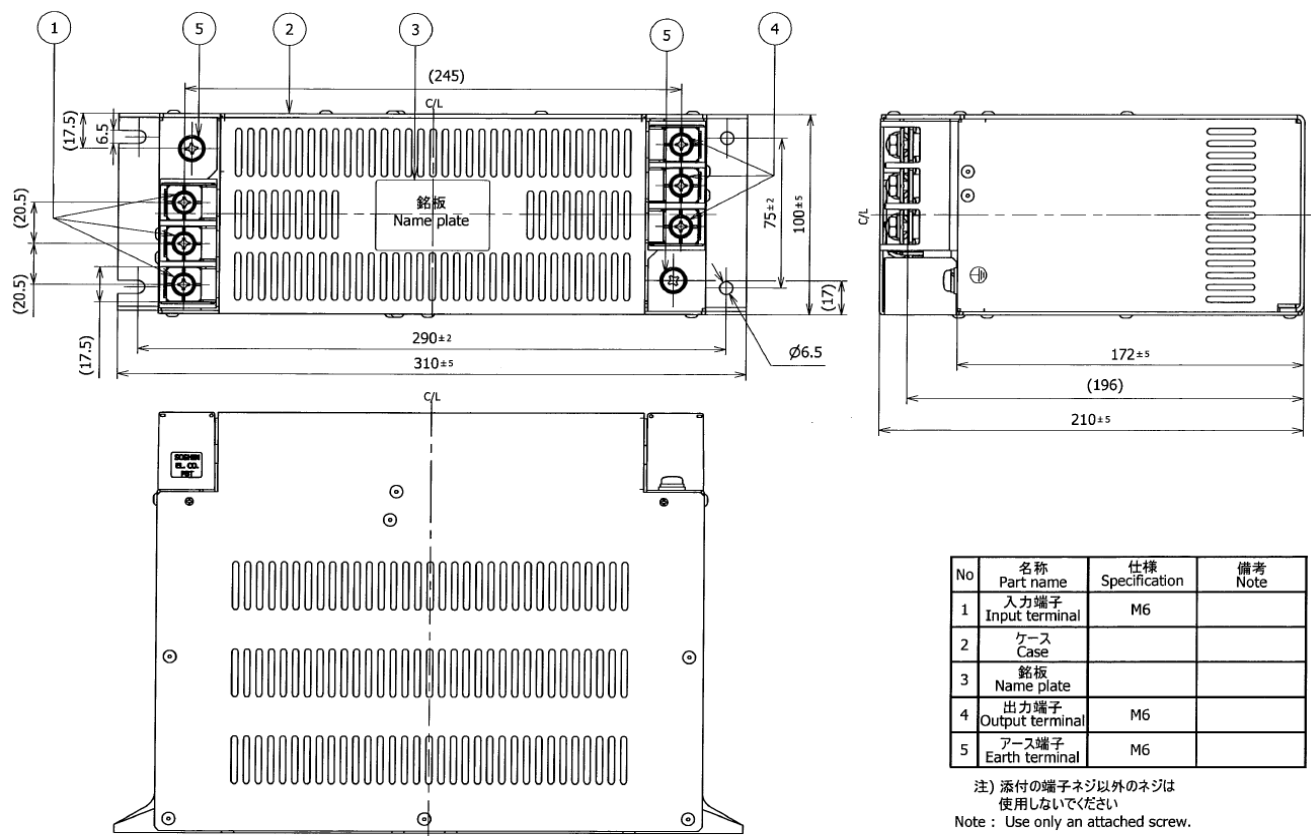


fig. 3 (150A)



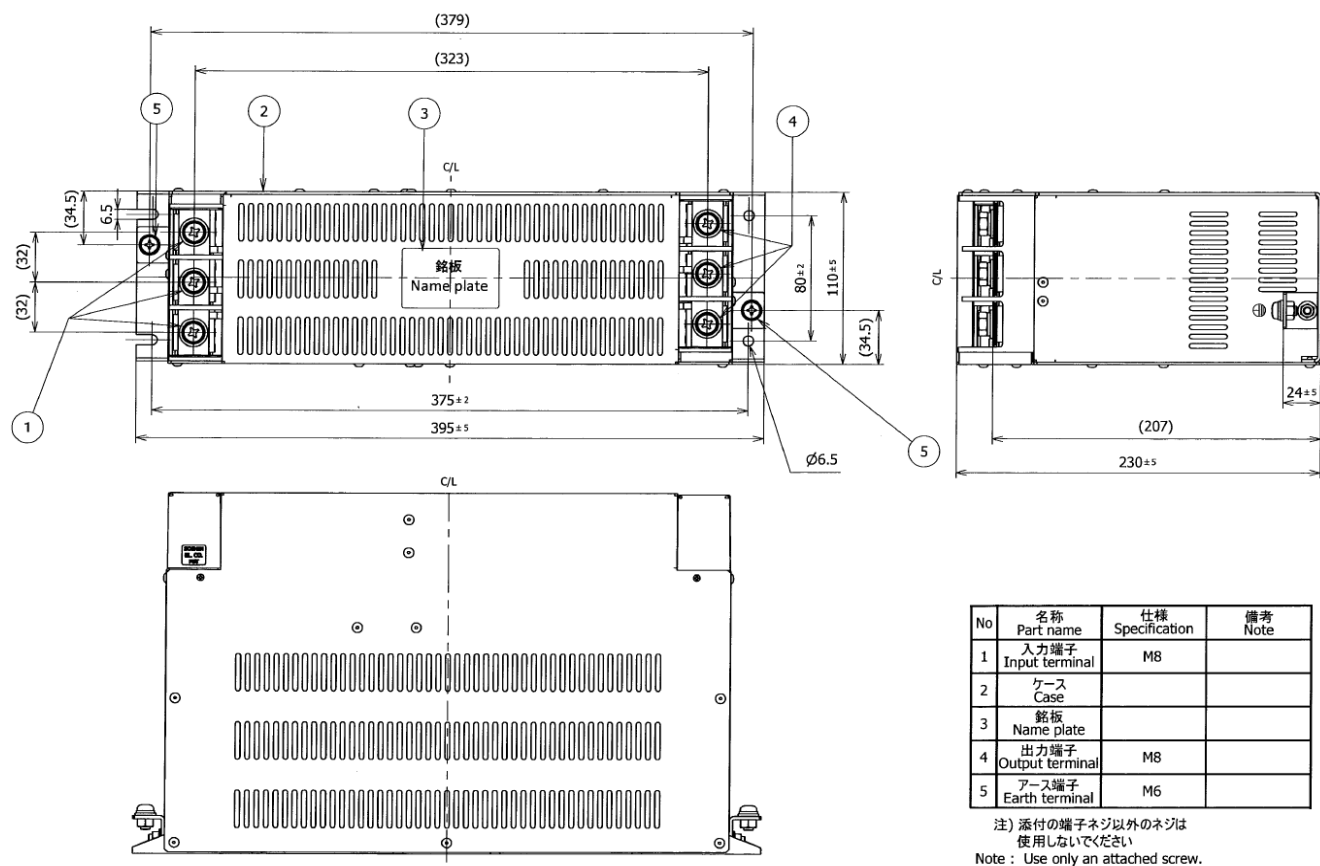


fig. 4 (200~300A)

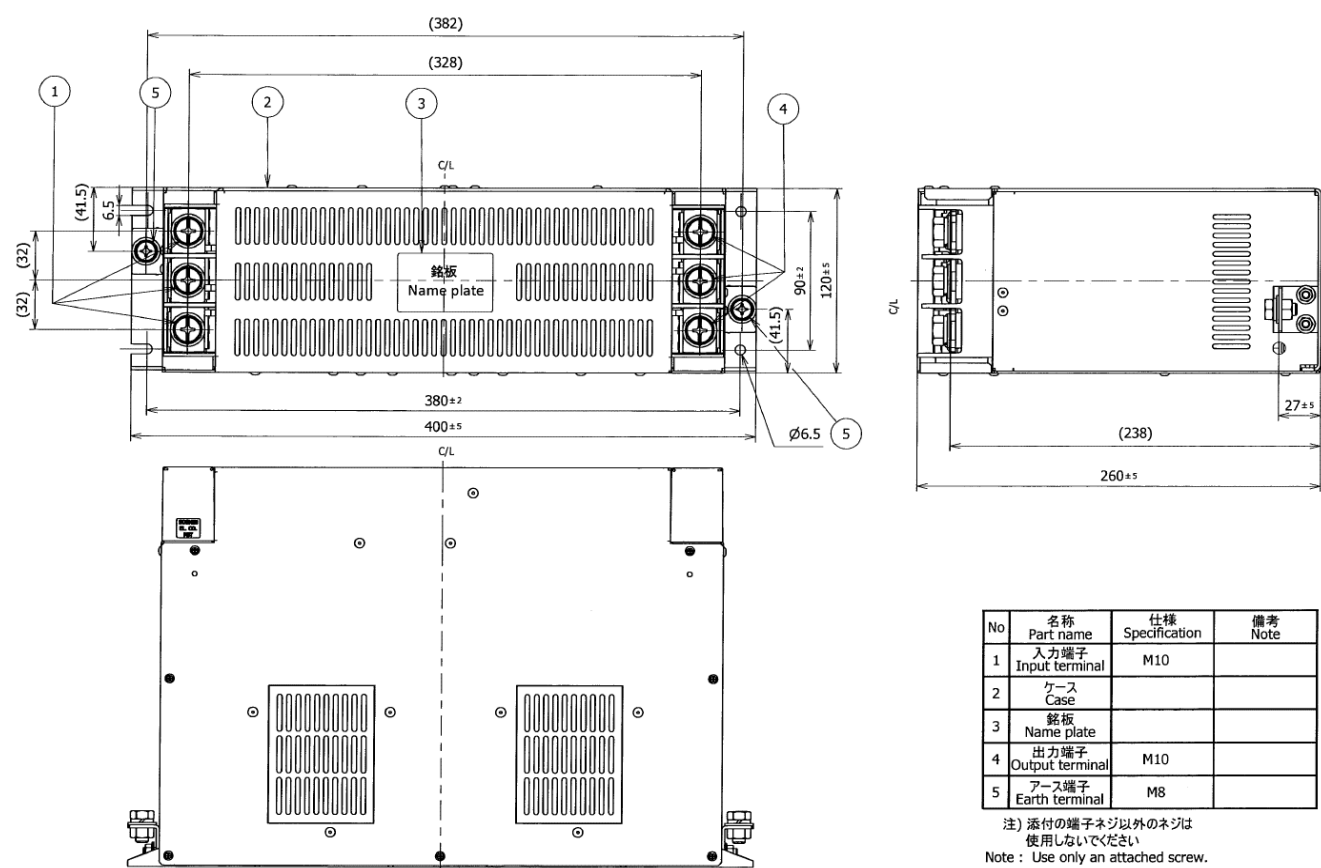

Characteristics (Typical) (50A)

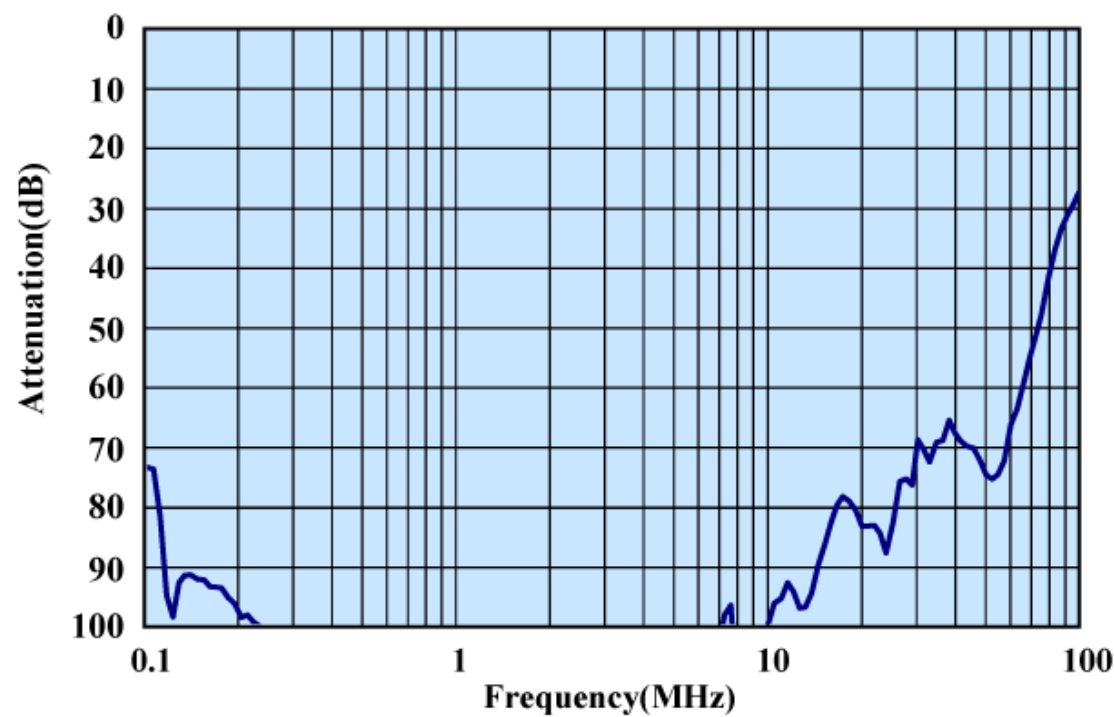

Circuit Diagram

