

SF2003A-AM1 Series (RoHS Compliant)

Single-phase 2-line 100VAC
For EMC Anechoic, Shielded Chamber (10MHZ-100MHZ)

Applications


For signal line of EMC Anechoic, Shielded Chamber

Specifications


Parts No.	Rated Current	Weight
SF2003A-AM1	3A	0.9kg

Rated Voltage	100VAC max
Leakage Current	2mA max 100VAC 60Hz
Ambient temp.	-20 up to 50 Deg.C

fig.

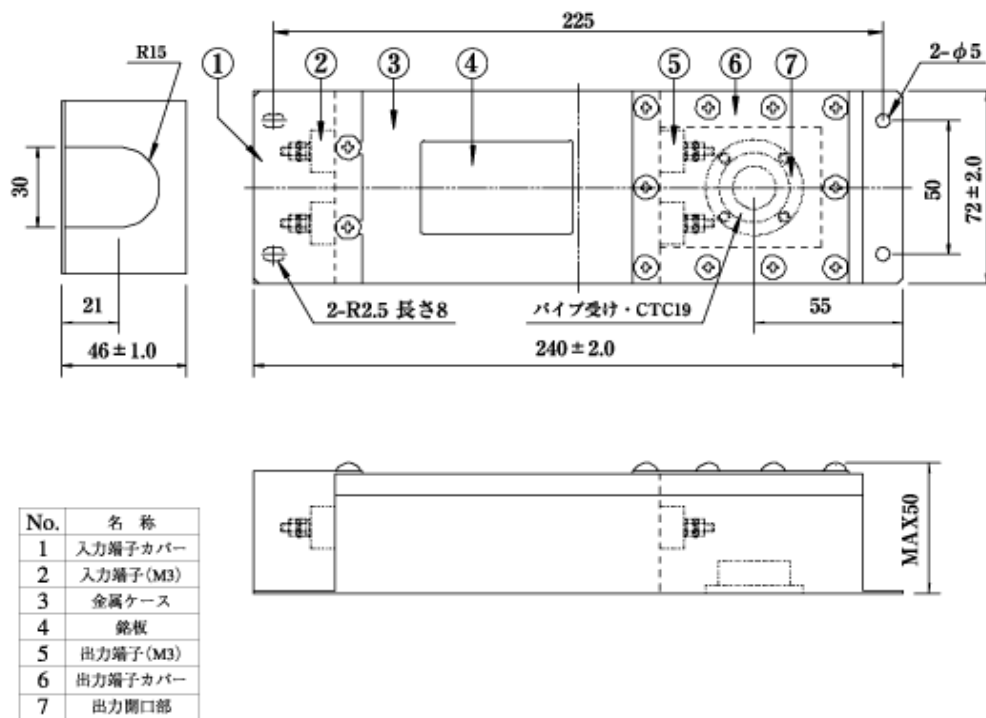

Attenuation Characteristics

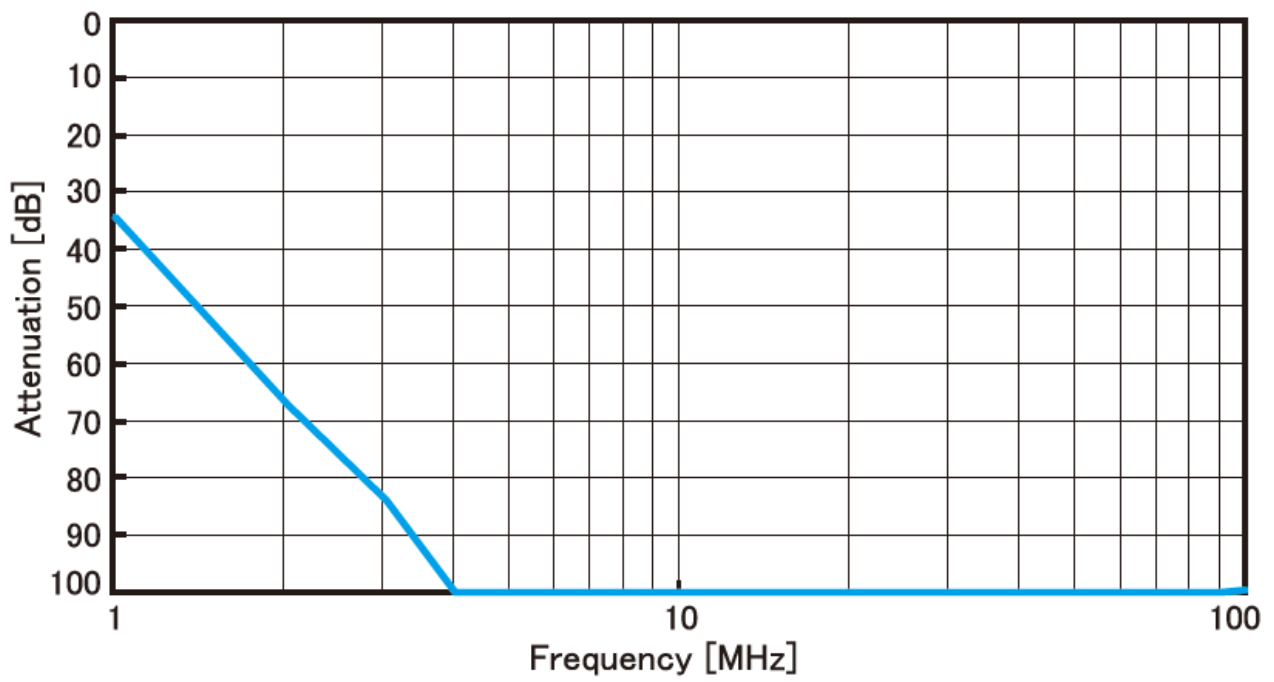

Circuit Diagram

