

HF3000C-TZA Series (RoHS Compliant)

3-phase 3-line 500VAC

Space saving Book type



UL1283/CSA C22.2 No8(C-UL) (file No.E102708)
EN60939-2 (file No.R50147299)

Applications

Semiconductor Equipment Machine Tool, General-purpose inverter and General-purpose Servo, Power source for CVCF, Elevator power supply, Factory power supply

Specifications

Part No.	Rated Current	Weight	
HF3080C-TZA	80A	5.4kg	fig1
HF3100C-TZA	100A	5.8kg	
HF3150C-TZA	150A	9.0kg	fig2
HF3200C-TZA	200A	11kg	
HF3250C-TZA	250A	12kg	fig3
HF3300C-TZA	300A	13kg	
Rated Voltage	500VAC		
Leakage Current	7mA 400VAC 50Hz By UL1283		
Ambient temp.	-20 up to 50 Deg.C		

fig.1 (80~100A)

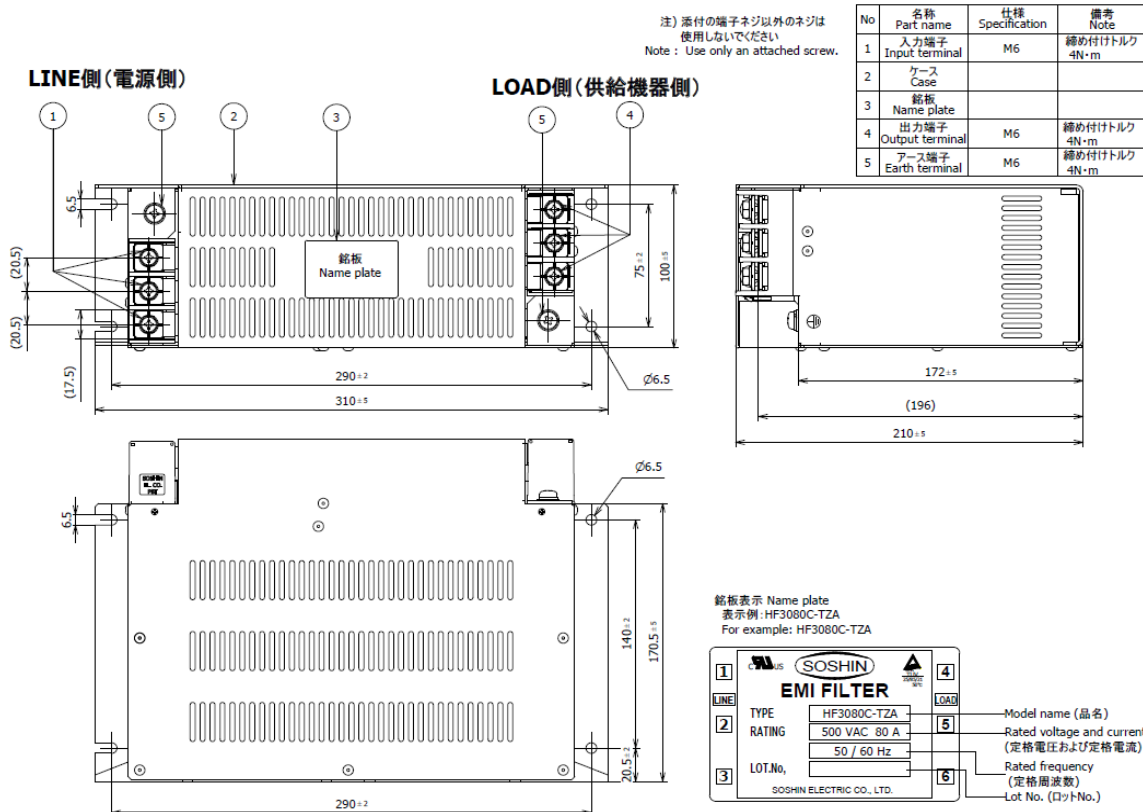


fig.2 (150A)



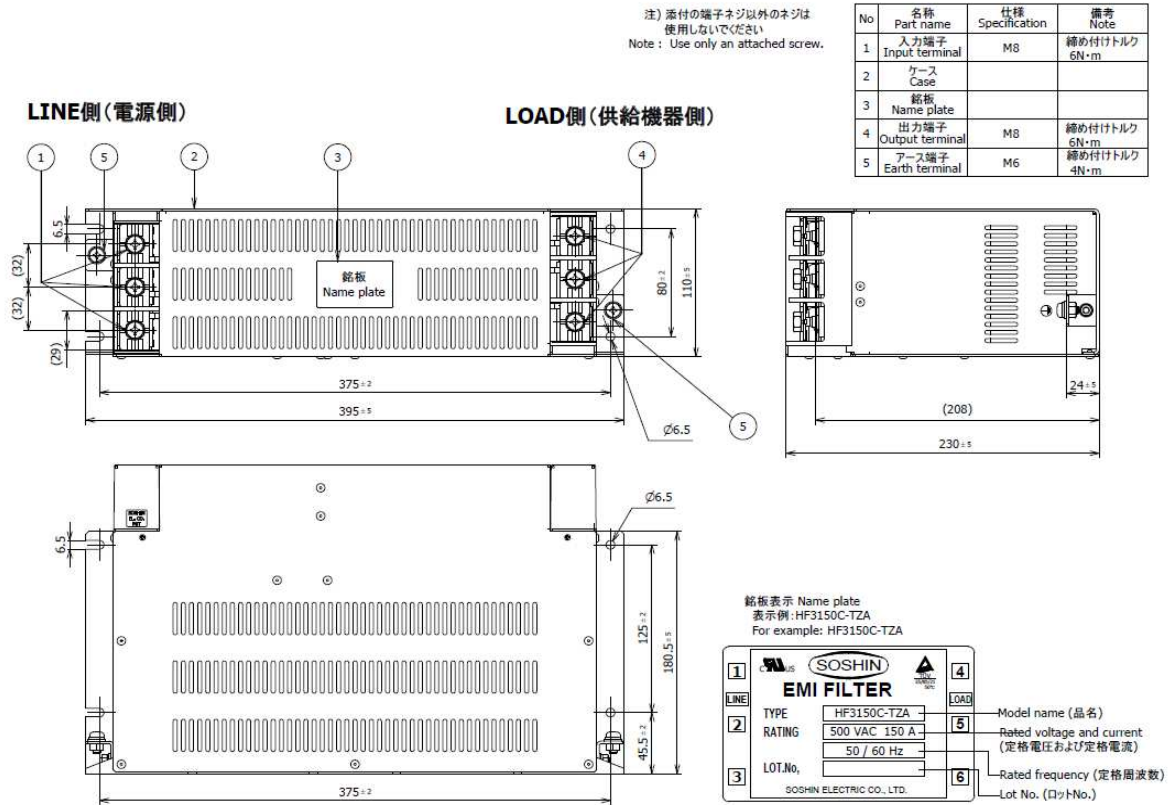


fig.3 (200~300A)

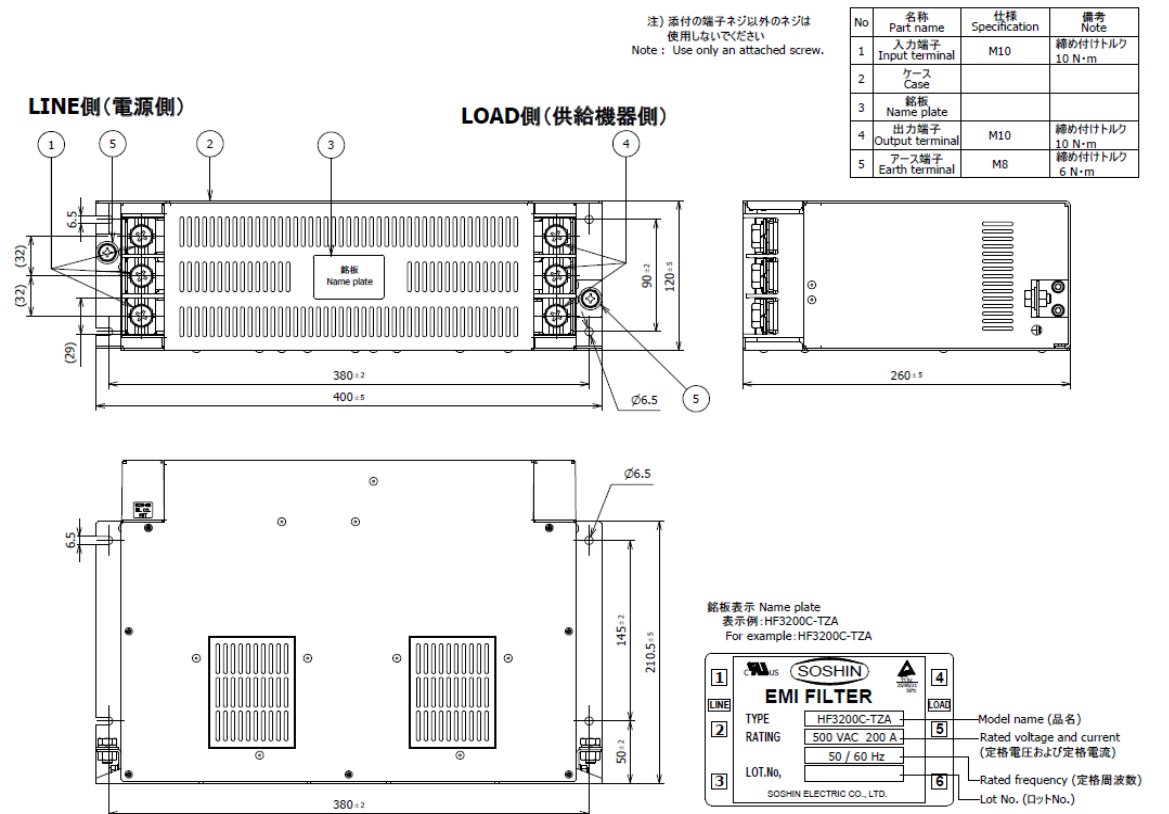

Characteristics (Typical) (100, 200A)

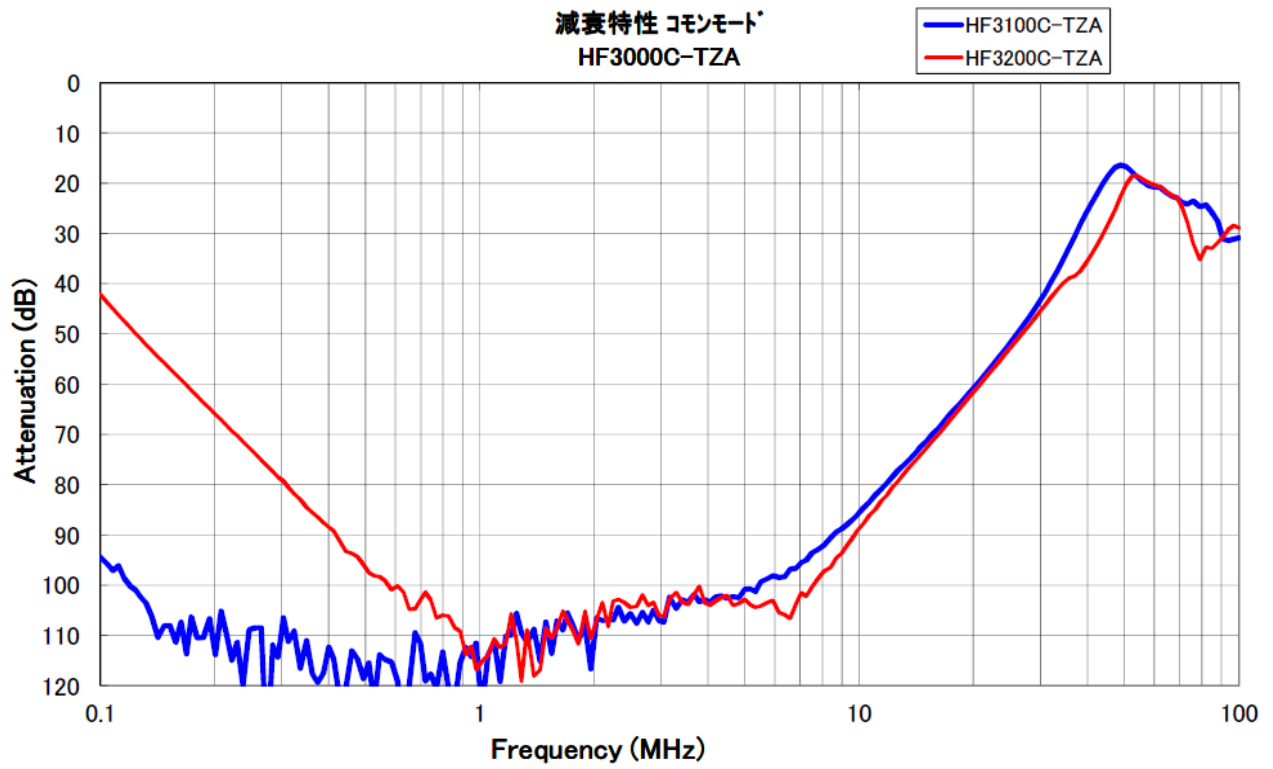

Circuit Diagram

