

NF2000A-SUM Series (RoHS Compliant)

Single-phase 2-line 250VAC

Dropout prevention screw type
DIN rail mounting option



UL1283/CSA C22.2 No8(C-UL) (file No.E102708)
EN60939-2 (file No.R50366085)


Applications

Switching regulator, General-purpose inverter, Semiconductor equipment, Machin tool,
Industrial robot, Medical equipment, Power source for CVCf,
Power source for elevator, Factory



Specifications

Part No.	Rated Current	Weight	
NF2010A-SUM	10A	150g	fig.1
NF2020A-SUM	20A	150g	
Rated Voltage	250VAC (250VDC)		
Leakage Current	0.6mA max 250VAC 60Hz By UL1283		
Ambient temp.	-25 up to 55 Deg.C		


fig.1

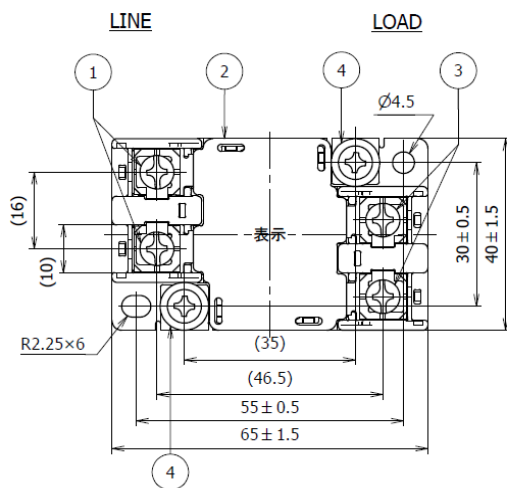

No	名称 Part name	仕様 Specification	備考 Note
1	入力端子 Input terminal	M4	ねじ脱着防止構造 保証締付トルク:1.2N・m
2	ケース Case		
3	出力端子 Output terminal	M4	ねじ脱着防止構造 保証締付トルク:1.2N・m
4	アース端子 Earth terminal	M4	保証締付トルク:1.2N・m




表示例
Example of Markings




印字方法
Printing method
レーザーマーカ 又は ラベル
Laser marker or label

Model name (品名)
Rated voltage and current
(定格電圧および定格電流)
Rated frequency
(定格周波数)
Lot No. (ロットNo.)

Characteristics (Typical) (10A)

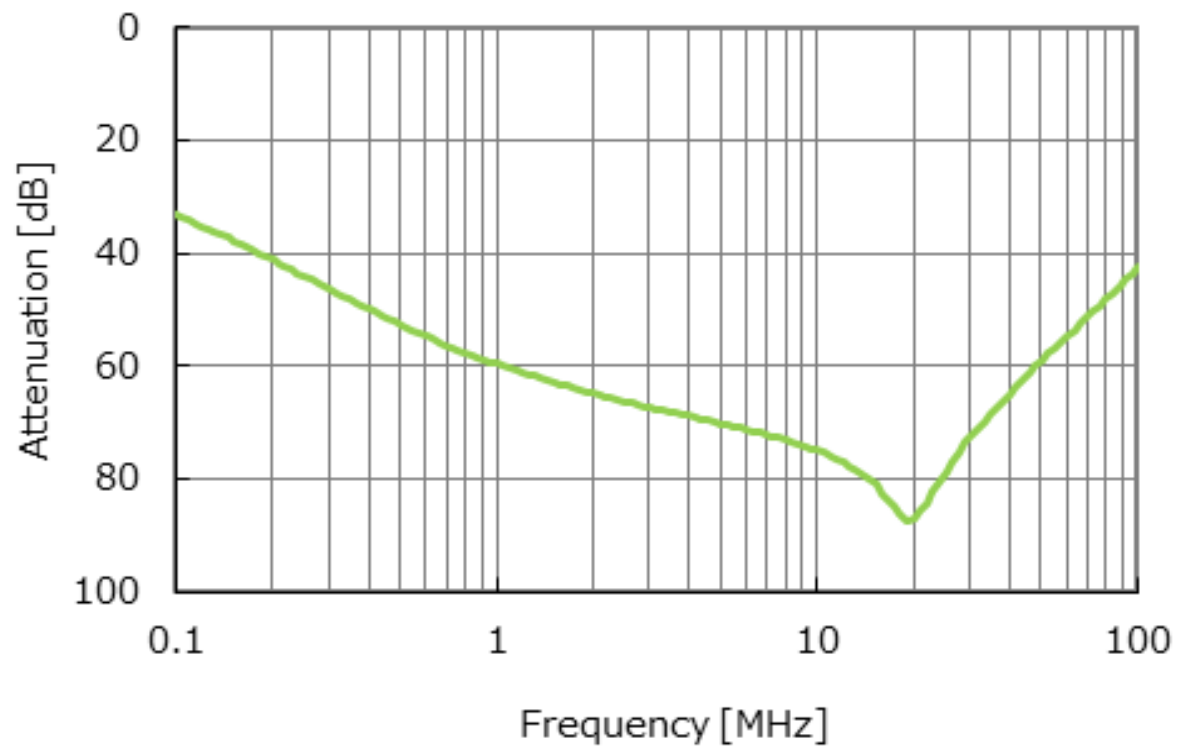

Characteristics (Typical) (20A)

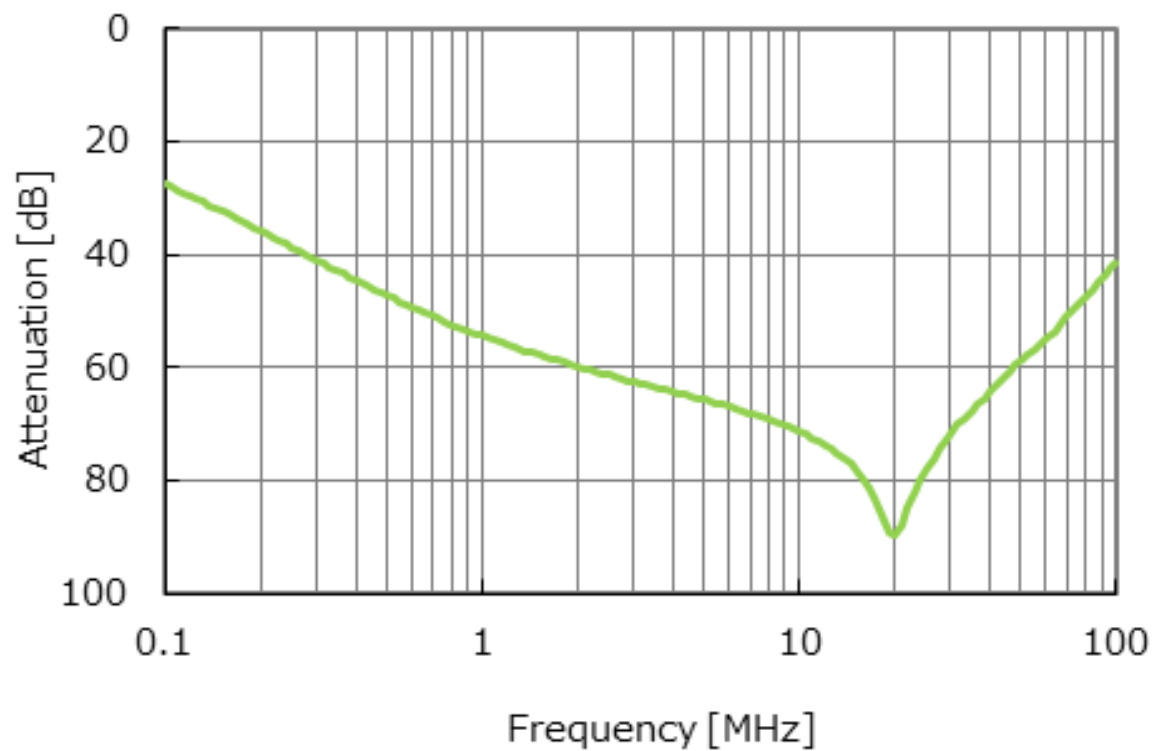

Circuit Diagram

