

# CLP3MHz-2786 For Oversampling (Fsx2)


## Applications

For Video Input/Output

## Specifications

CLP3MHz-2786	
Zin/Zout	470 ohm (Unbaranced)
Insertion Loss	1.0+/-0.1dB max (at 200KHz)
Pass Band Ripple	+/-0.15dB max (0.1 up to 3MHz)
Attenuation	20dB min (at 6.75MHz)
	40dB min (10.5 up to 15MHz)
Group Delay	183+/-10ns max (0.1 up to 3MHz)

## Dimensions

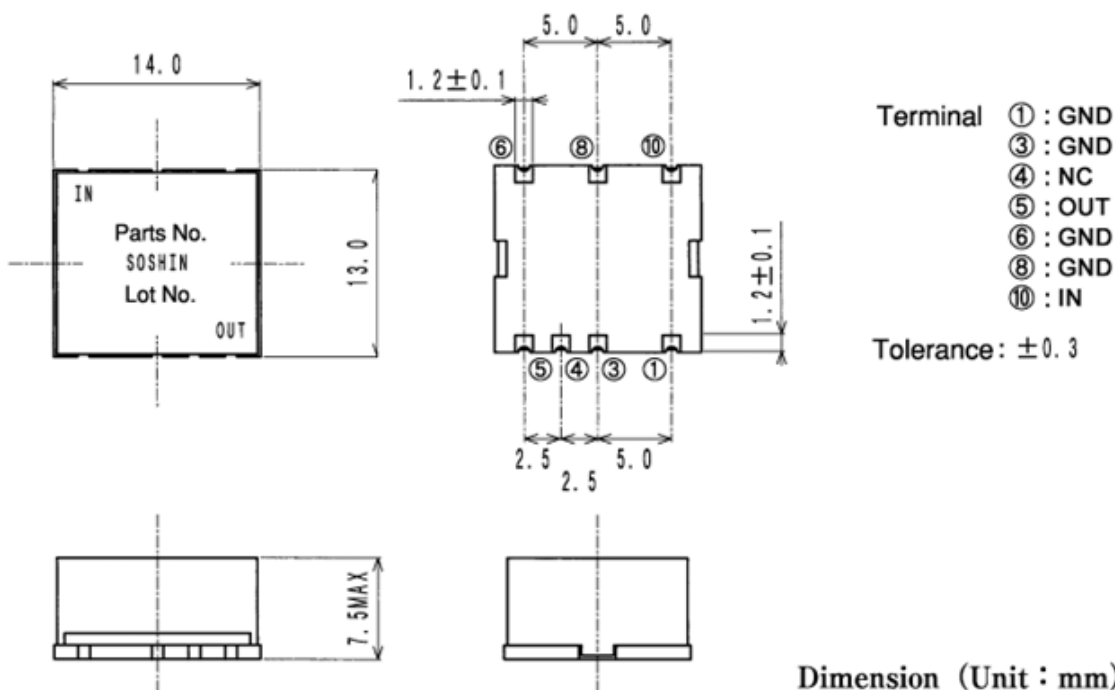

## Characteristics (Typical)

