

LP15MHz-1553


Applications

For Digital Studio

Specifications

| LP15MHz-1553 | |
|------------------|-----------------------------------|
| Zin/Zout | 75 ohm (Unbaranced) |
| Insertion Loss | 3.5dB max (at 500KHz) |
| Pass Band Ripple | 0.1dBp-p max (0.1 up to 15MHz) |
| Attenuation | 6.0dB min (at 18.5652MHz) |
| | 40dB min (22.125 up to 27.125MHz) |
| | 50dB min (27.125 up to 50MHz) |
| Group Delay | 279+/-5ns max (at 500KHz) |
| | 2.0nsp-p max (0.1 up to 10MHz) |
| | 3.0nsp-p max (0.1 up to 15MHz) |

Dimensions

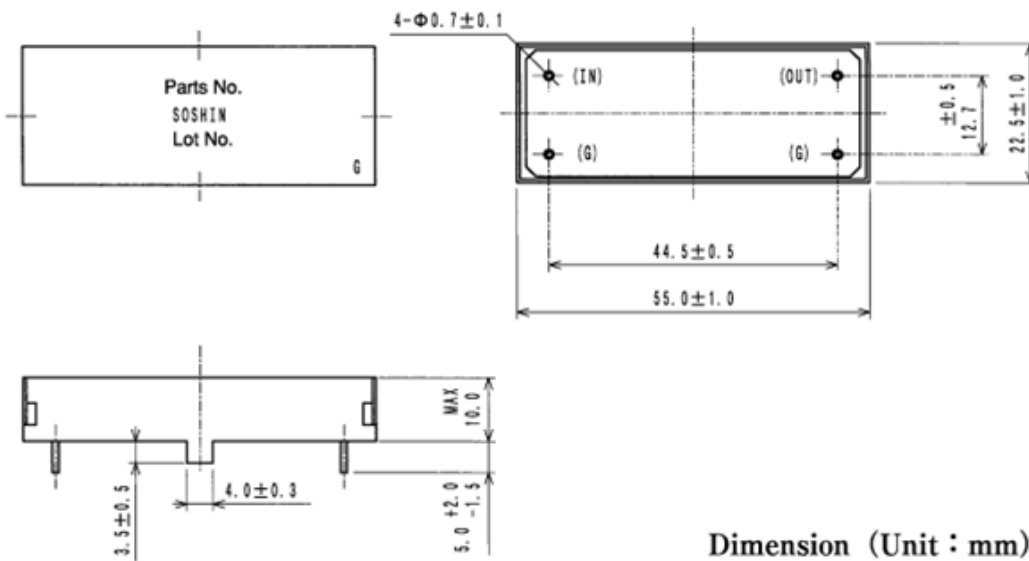

Chracteristics (Typical)

