

NF2000A-SUM Series (RoHS Compliant)

Single-phase 2-line 250VAC

Dropout prevention screw type
DIN rail mounting option



UL1283/CSA C22.2 No8(C-UL) (file No.E102708)
EN60939-2 (file No.R50366085)


Applications

Switching regulator, General-purpose inverter, Semiconductor equipment, Machin tool,
Industrial robot, Medical equipment, Power source for CVCF,
Power source for elevator, Factory


Specifications

Part No.	Rated Current	Weight	
NF2010A-SUM	10A	150g	fig.1
NF2020A-SUM	20A	150g	
Rated Voltage	250VAC		
Leakage Current	0.6mA max 250VAC 60Hz By UL1283		
Ambient temp.	-25 up to 55 Deg.C		


fig.1

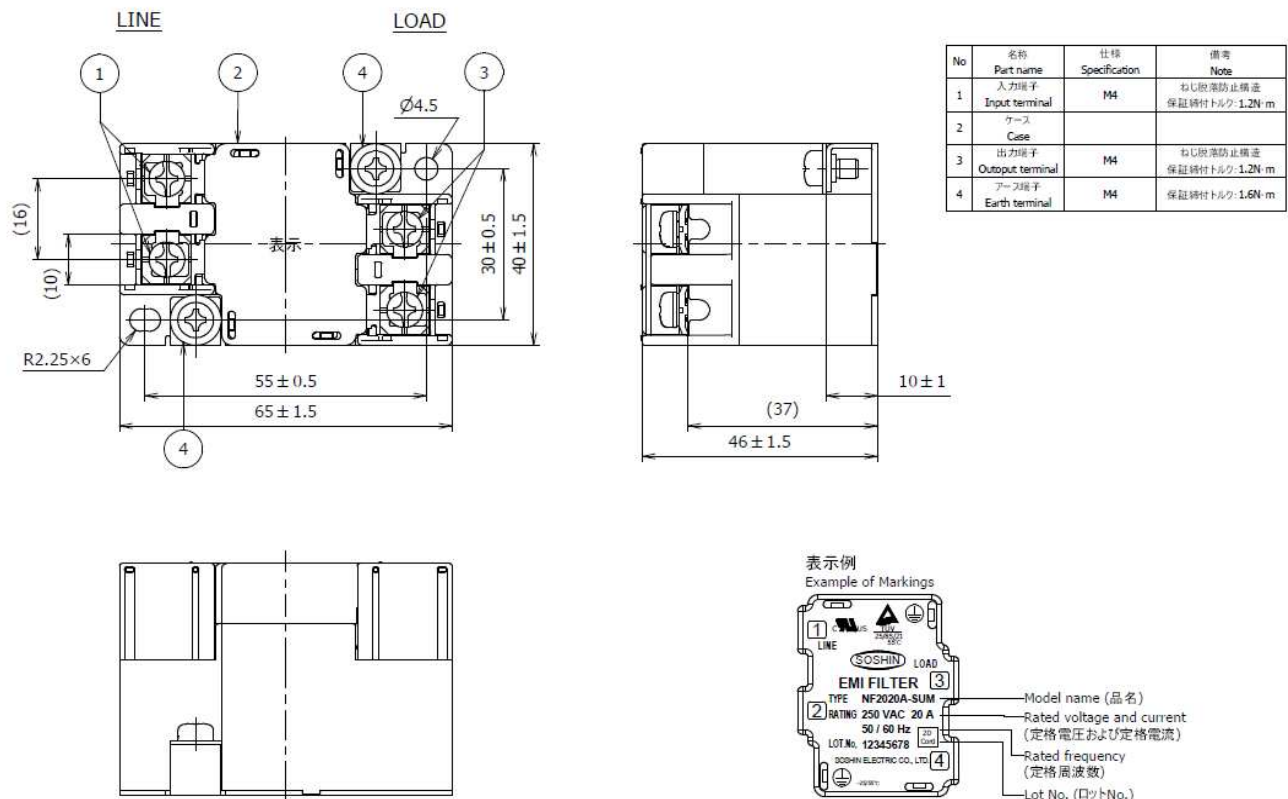

Characteristics (Typical) (10A)

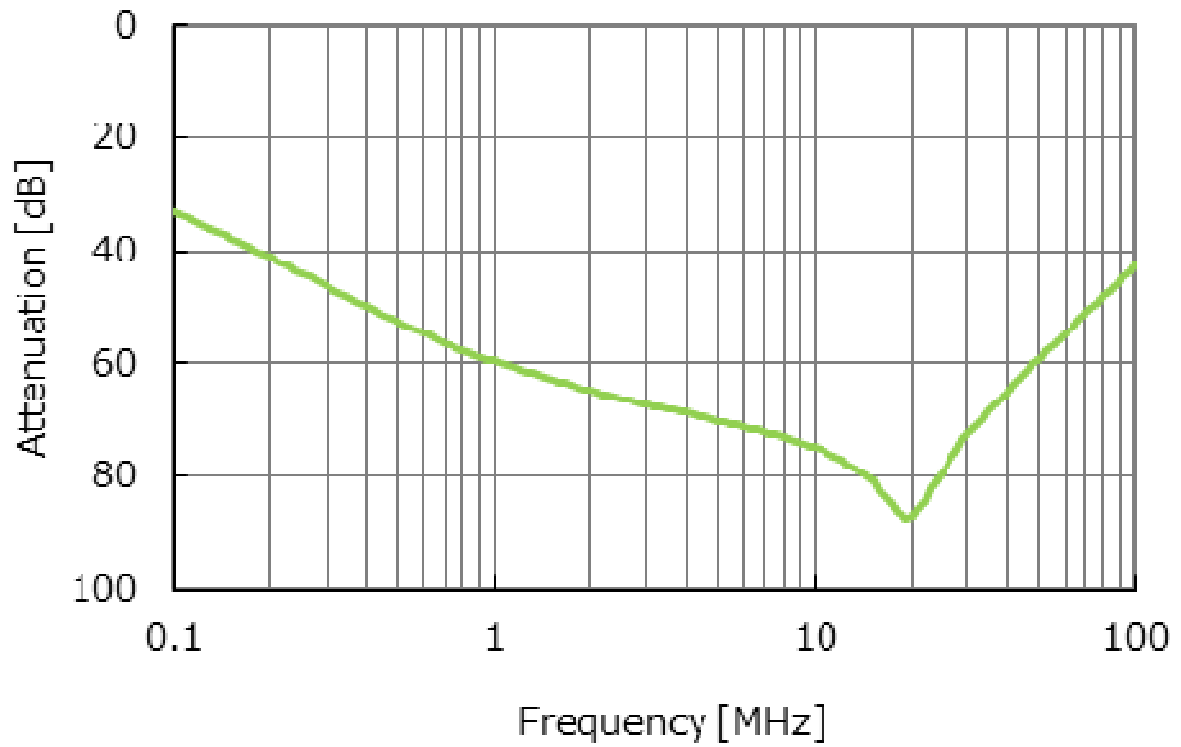

Characteristics (Typical) (20A)

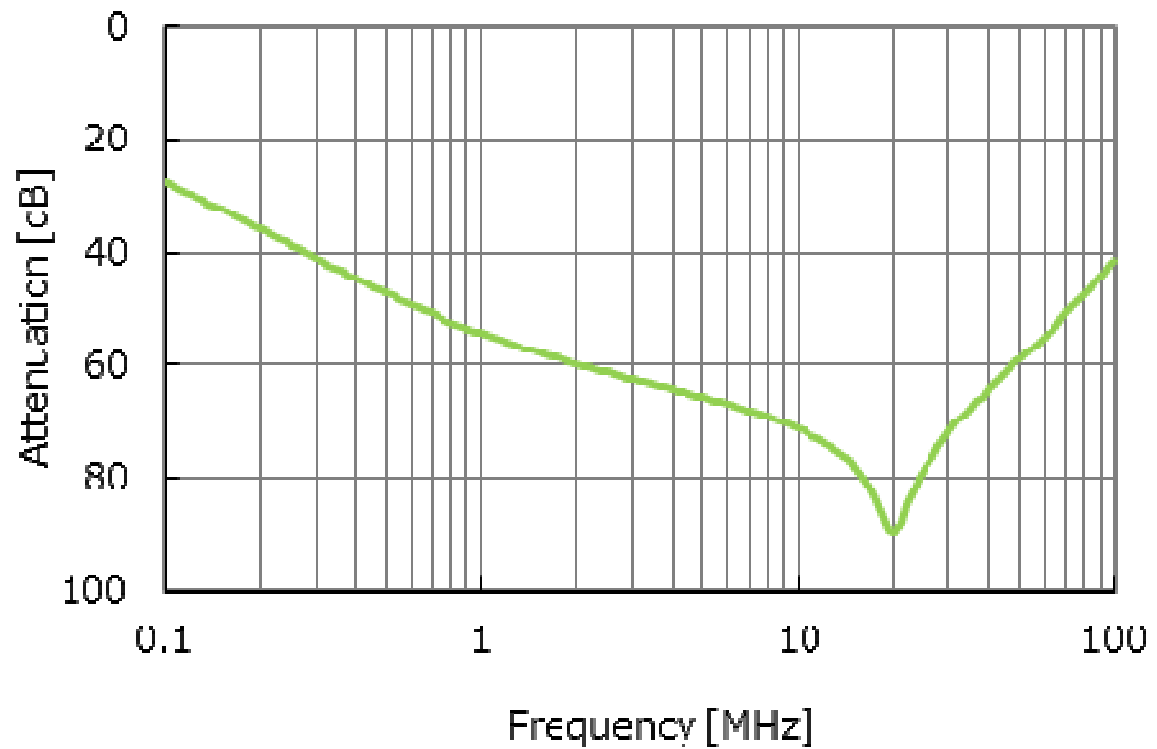

Circuit Diagram

