

SF2001A-BD Series (RoHS Compliant)

Single-phase 2-line 250VAC

For EMC Anechoic, Shielded Chamber (500KHz-1GHz)



Applications


For signal line of EMC Anechoic, Shielded Chamber

Specifications


Parts No.	Rated Current	Weight
SF2001A-BD	1A	1.7kg

Rated Voltage	250VAC max
Leakage Current	8mA max 250VAC 60Hz
Ambient temp.	-20 up to 50 Deg.C

fig.

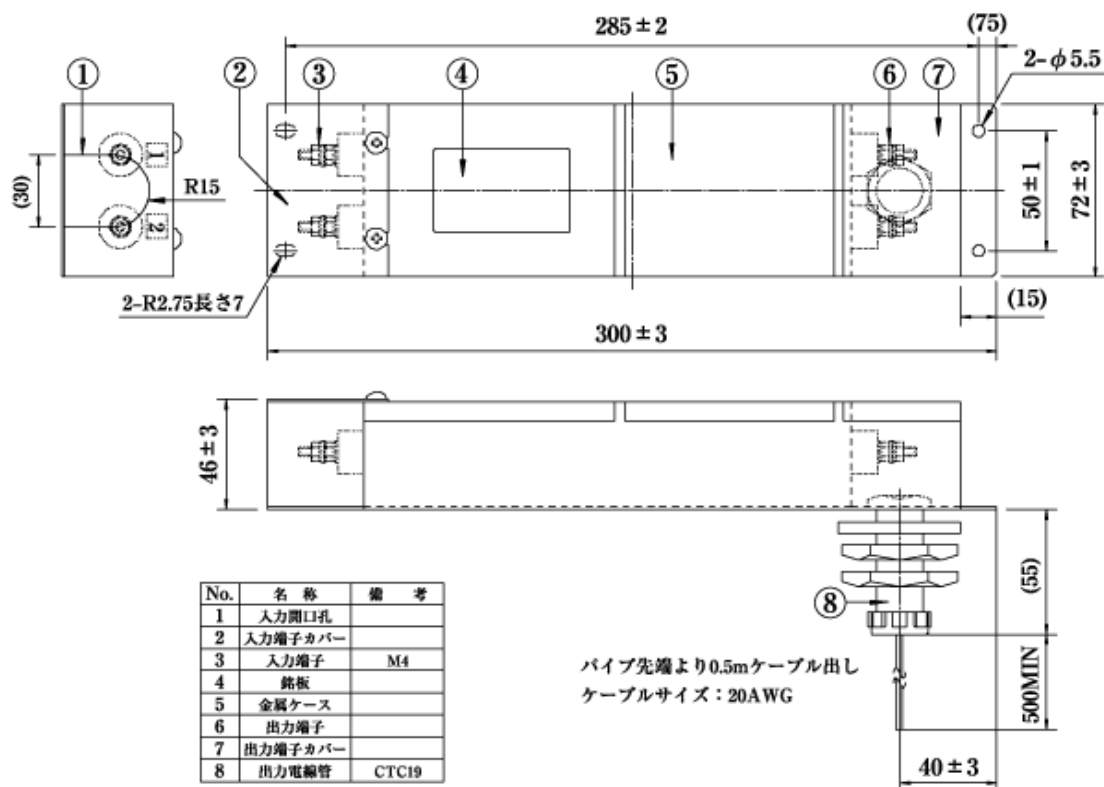

Attenuation Characteristics

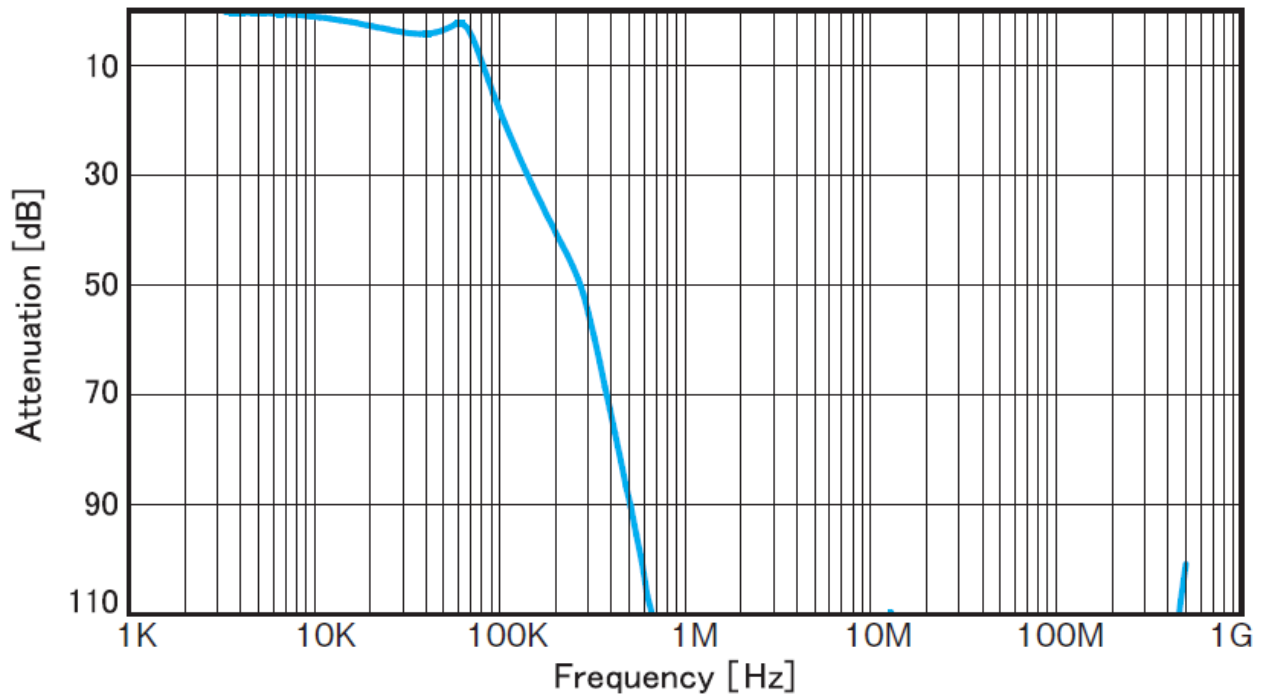

Circuit Diagram

