


HF3000C-RxA Series (RoHS Compliant)

三相3线式500VAC

节省空间 · 2级线圈EMI滤波器

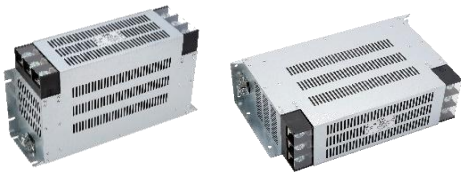

Type Approved
 Safety
 Regular Production
 Surveillance
 www.tuv.com
 ID 2000000000

UL60939-3 (file No.TU50655138) (TUVus)
 EN60939-3 (file No.R50655123)

SCCR对应品

- 与断路器组合取得
- 若为Listed认证品，可使用任何厂家的断路器

用途

半导体制造设备、大型机床、通用变频器、伺服等应用设备

规格

Part No.	Rated Current	SCCR	Weight	
HF3080C-RxA	80A	22kA	4.0kg	fig.1
HF3100C-RxA	100A			
HF3150C-RxA	150A	30kA	5.6kg	fig.2
HF3200C-RxA	200A	42kA	7.0kg	fig.3
HF3250C-RxA	250A		9.0kg	
HF3300C-RxA	300A		13.0kg	
HF3400C-RxA	400A		14.0kg	fig.5
HF3400C-RxA0	400A			
Rated Voltage	500VAC max			
Leakage Current	0.5mA max 400VAC 50Hz(by IEC60939-3 Y结线通常状态) 6.9mA max 400VAC 50Hz(by UL60939-3 Y结线一相欠相状态) 8.3mA max 200VAC 60Hz(Δ结线一相接地电源)			
Ambient temp.	-40 up to 50 Deg.C			

fig.1 (80、100A)

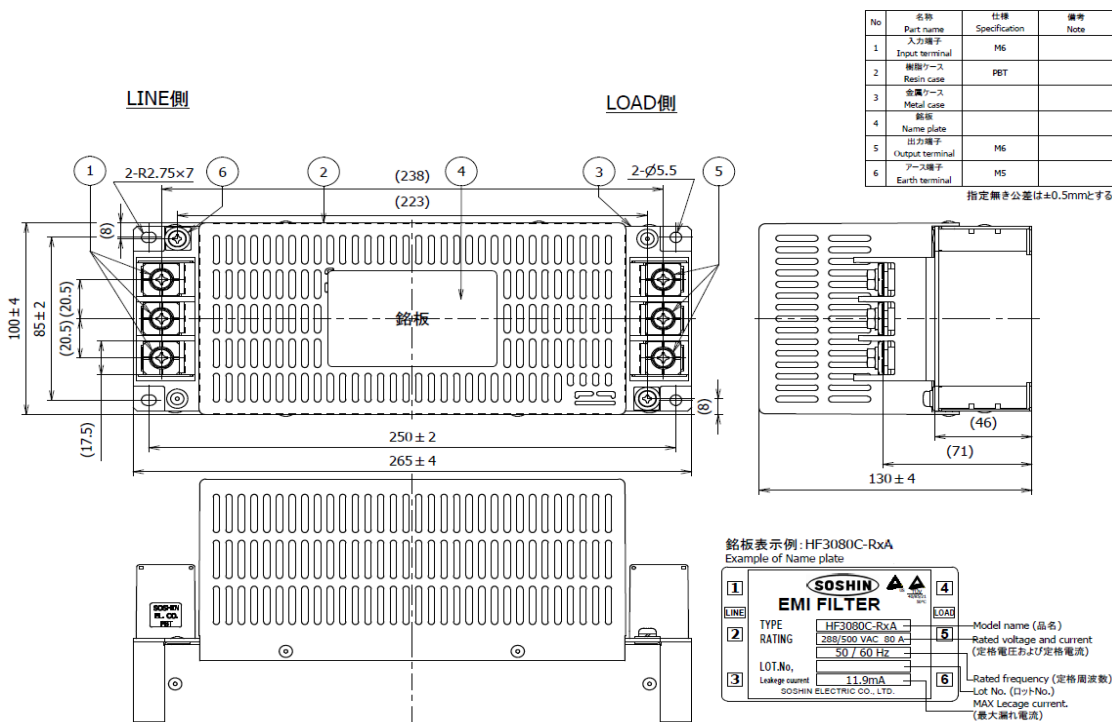


fig.2 (150A)

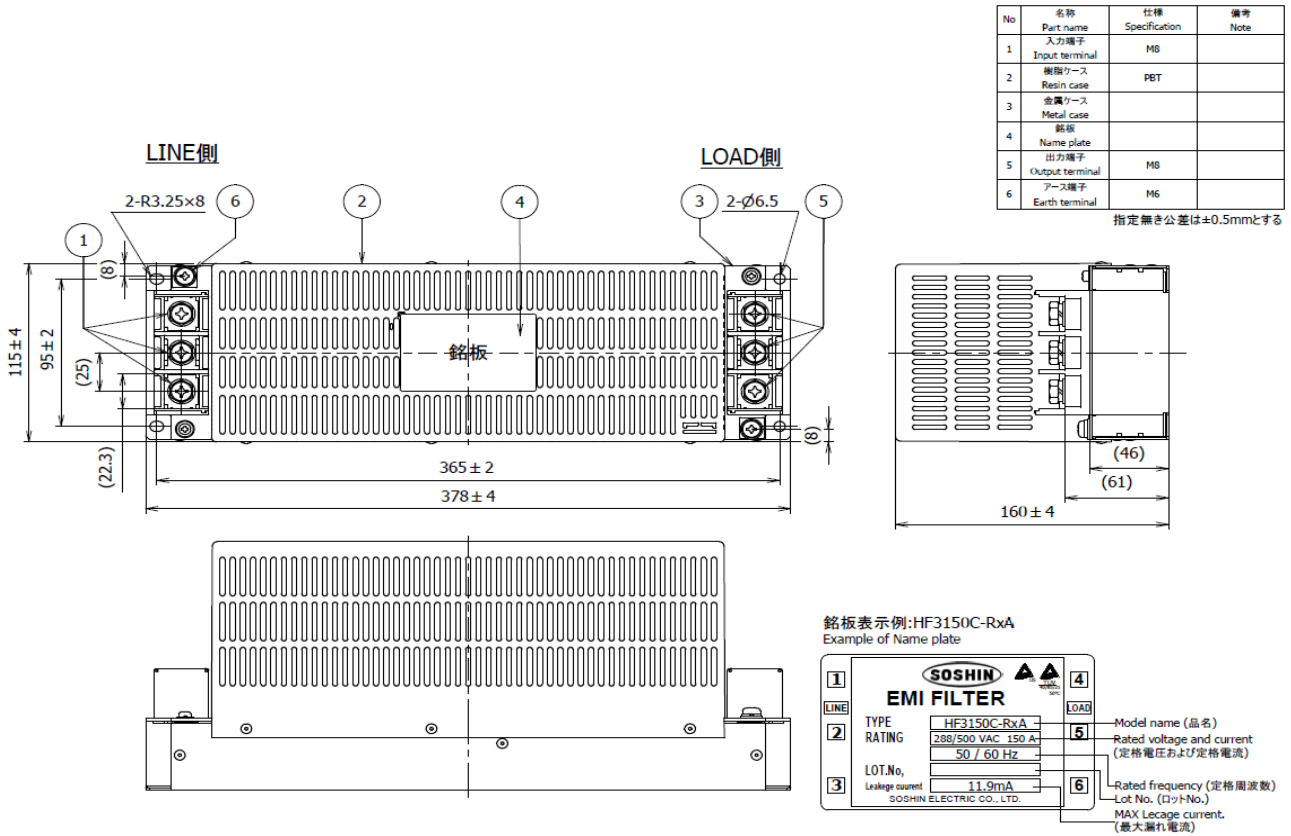


fig. 3 (200A~300A)

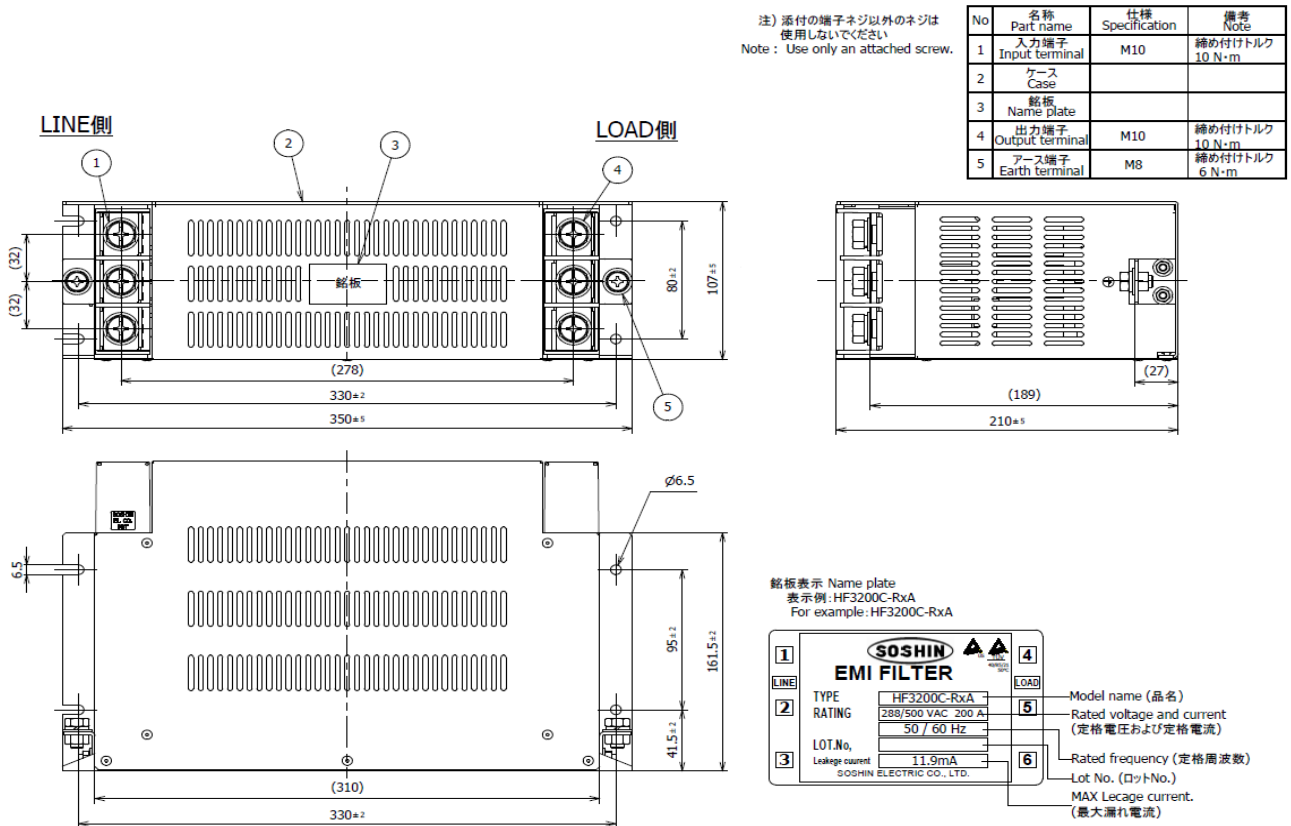


fig. 4 (400A)



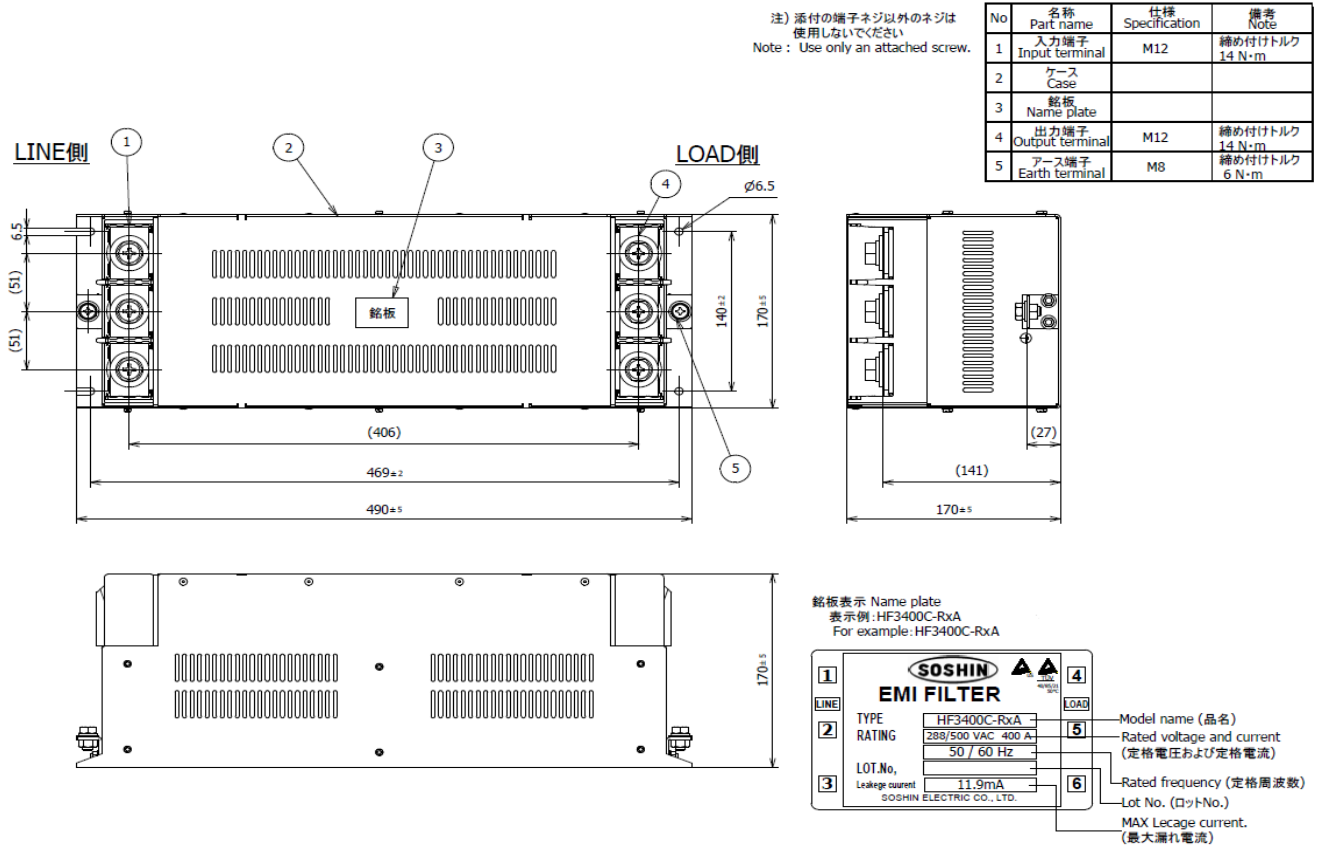


fig. 5 (400A)

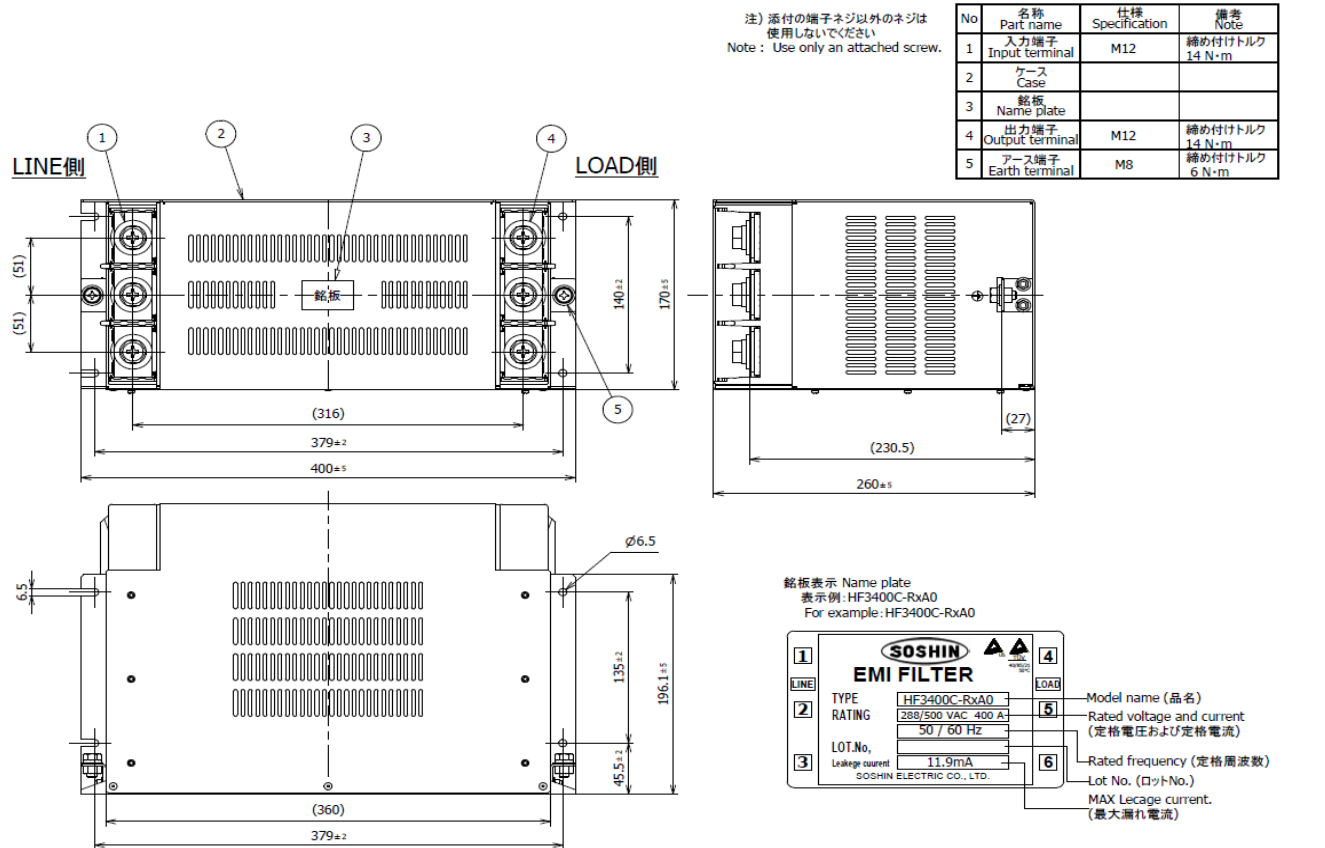

代表特性 (Typical) (HF3150C-RxA)

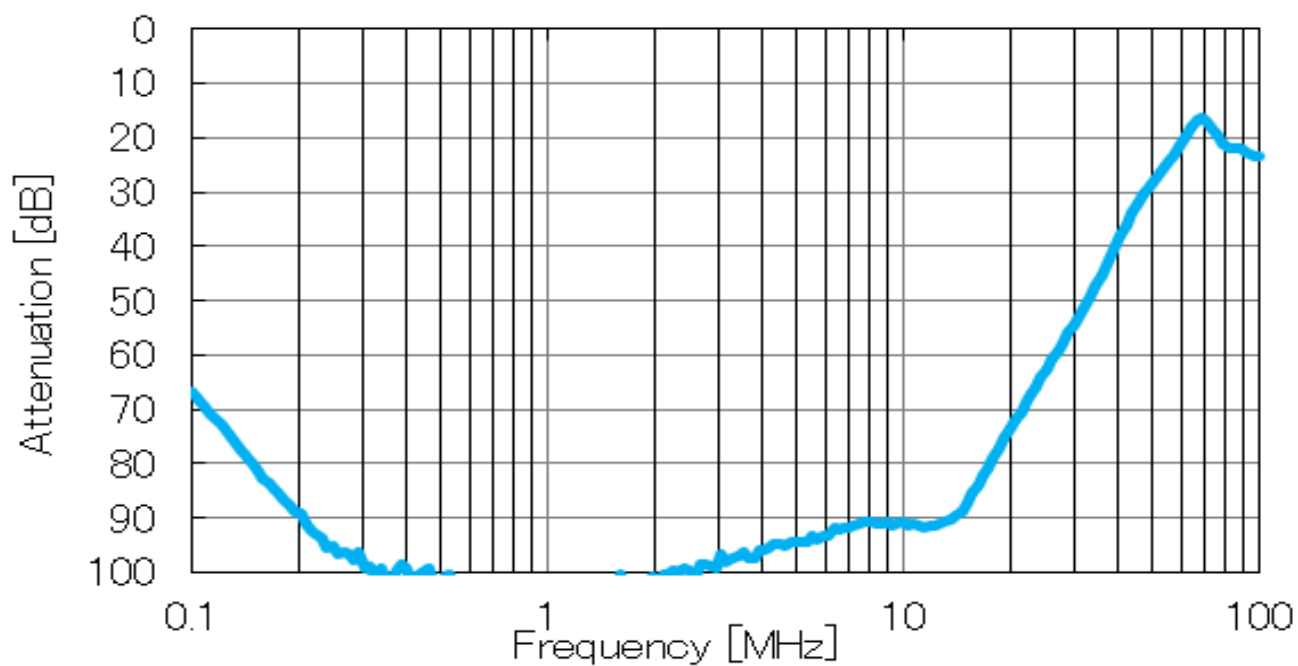

电路图

