

NF3000C-UQA Series (RoHS认证产品)

三相三线式 480VAC

大电流省空间型(低泄漏电流型)



400A产品 外观



Type Approved
Safety
Regular Production
Surveillance
www.tuv.com
ID 2000000000

UL1283 (file No.E102708)

EN60939-2 (file No.R50031225)

SCCR对应品

- 与断路器组合取得
- 若为Listed认证品, 可使用任何厂家的断路器


用途

IGBT变频器、AC伺服、NC控制器等

规格

Part No.	Rated Current	SCCR value	Weight	
NF3200C-UQA	200A	42kA	10Kg	fig1
NF3250C-UQA	250A		11Kg	
NF3300C-UQA	300A		12Kg	
NF3400C-UQA	400A	-	20Kg	fig2
NF3500C-UQA	500A		26Kg	fig3
NF3600C-UQA	600A		26Kg	
NF3700C-UQA	700A		38Kg	fig4
NF3800C-UQA	800A		38Kg	
NF3900C-UQA	900A	60Kg	fig5	
NF31000C-UQA	1000A	60Kg		
Rated Voltage	480VAC max			
Leakage Current	10mA max/400VAC 50Hz By UL1283			
Ambient temp.	-20 up to 50 Deg.C			

fig. 1 (200, 250, 300A)

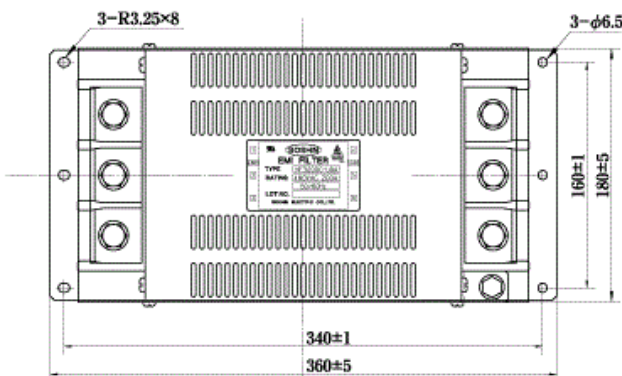

No	Item	Notes
①	Input terminal	M10
②	Metal case	
③	Label	
④	Output terminal	M10
⑤	Earthing terminal	M8







fig. 2 (400A)

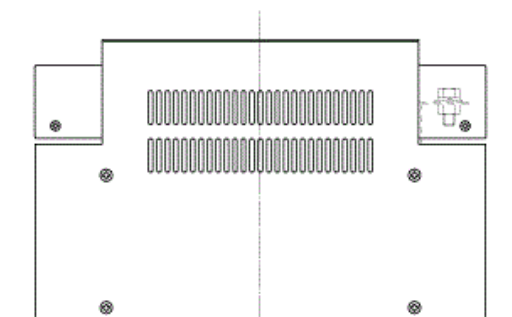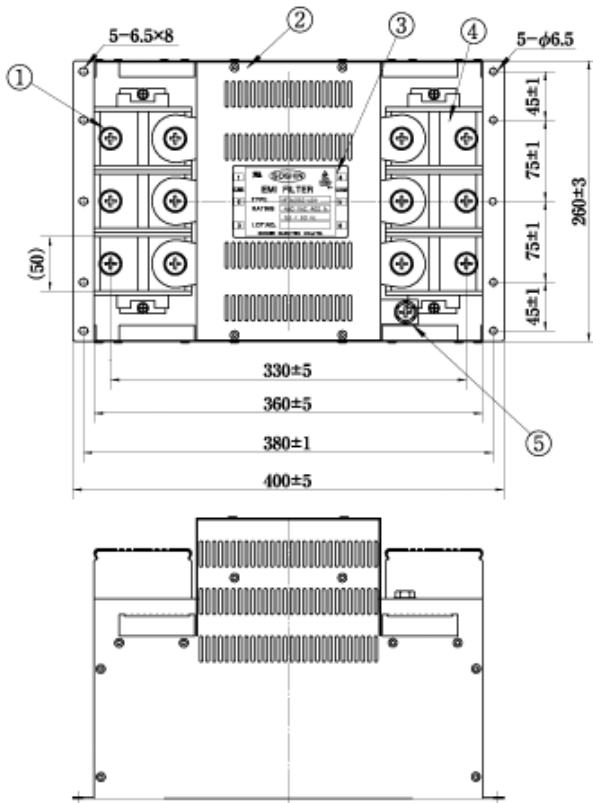


No	Item	Notes
①	Input terminal	M12
②	Metal case	
③	Label	
④	Output terminal	M12
⑤	Earthing terminal	M10

fig. 3 (500, 600A)

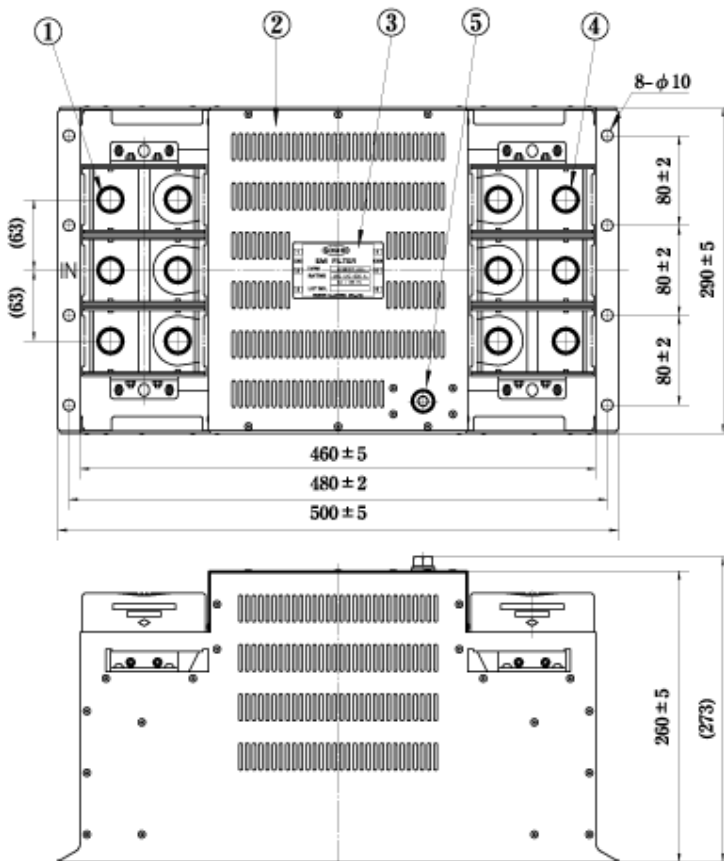

No	Item
1	Input terminal (M12)
2	Metal case
3	Label
4	Output terminal (M12)
5	Earthing terminal (M10)

fig. 4 (700, 800A)

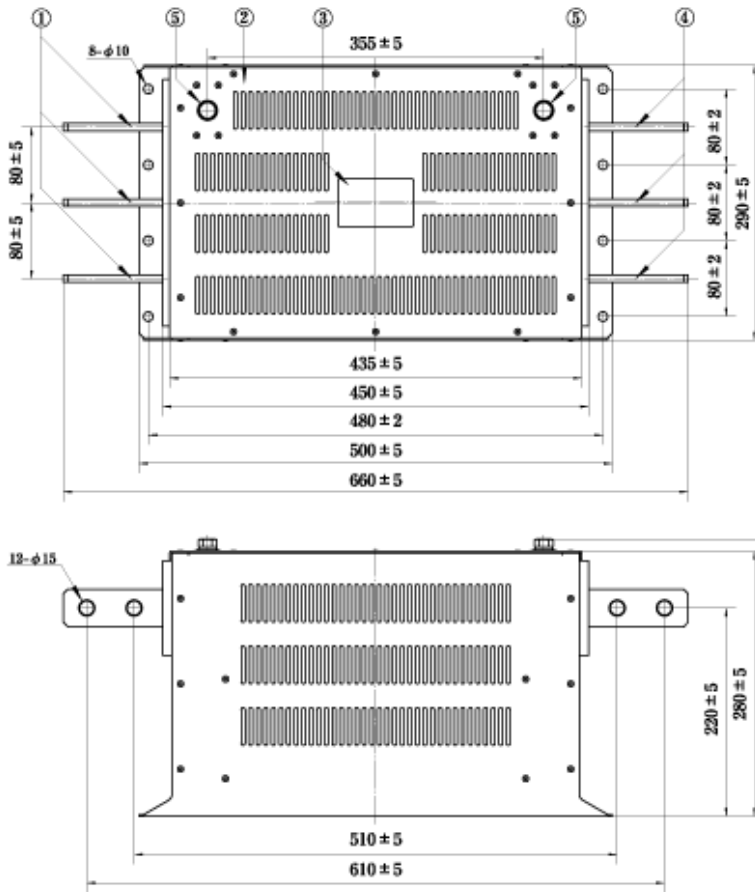

No	Item
1	Input terminal
2	Metal case
3	Label
4	Output terminal
5	Earthing terminal (M10)







fig. 5 (900, 1000A)

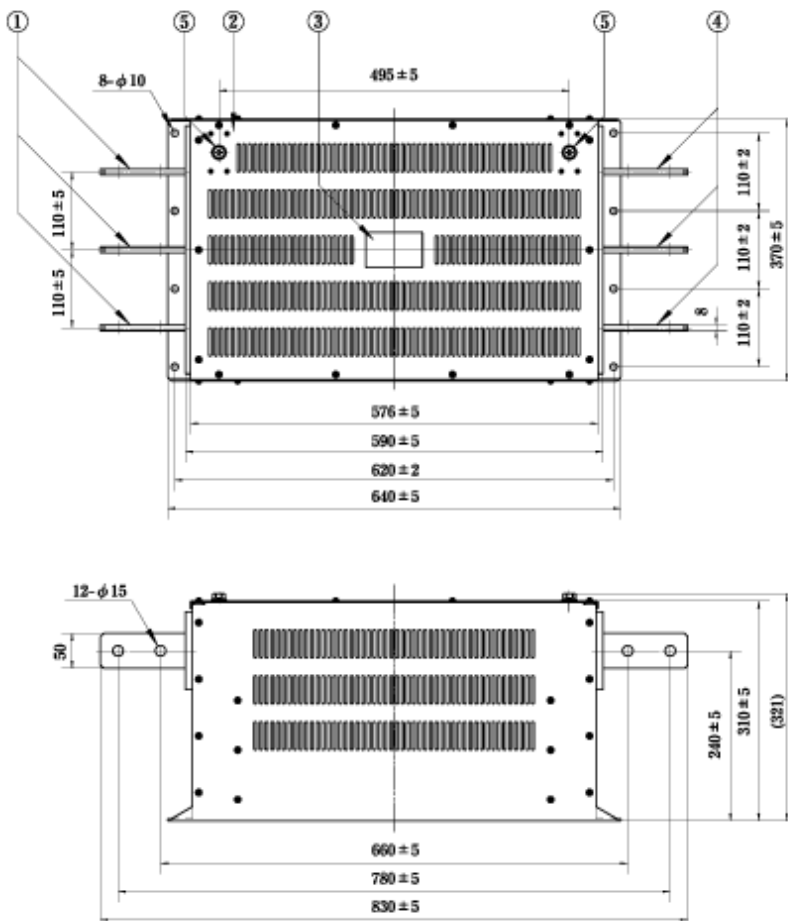

No	名称 Item
1	入力端子 Input terminal
2	金属ケース Metal case
3	銘板 Label
4	出力端子 Output terminal
5	接地端子 Earthing terminal(M10)

衰减特性 (200A)

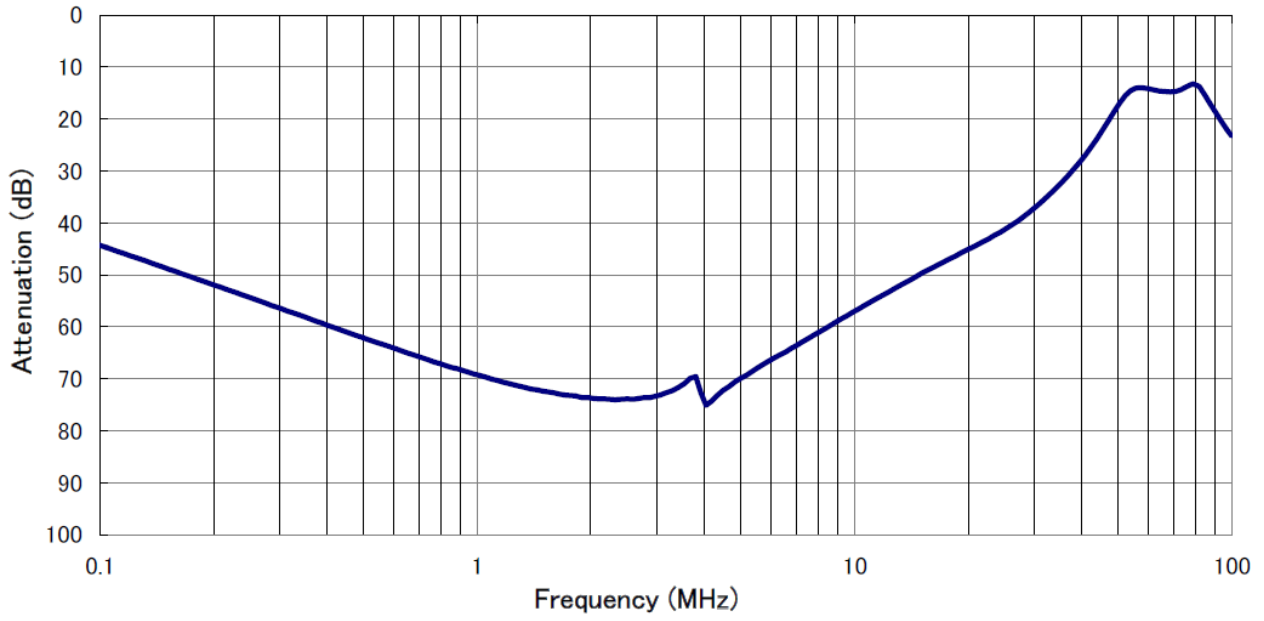

衰减特性 (600A)

