

NF2000A-SUM Series (RoHS认证产品)

单相 250VAC

 螺丝脱落防止功能
 DIN导轨对应(选项)

 UL1283/CSA C22.2 No8(C-UL) (file No.E102708)
 EN60939-2 (file No.R50366085)



用途

 开关电源、通用逆变器、半导体制造装置、机床、工业机器人、医疗电子设备、
 CVCF等的电源装置、电梯电源、工厂电源等



规格

| Part No. | Rated Current | Weight | |
|-----------------|---------------------------------|--------|-------|
| NF2010A-SUM | 10A | 150g | fig.1 |
| NF2020A-SUM | 20A | 150g | |
| Rated Voltage | 250VAC (250VDC) | | |
| Leakage Current | 0.6mA max 250VAC 60Hz By UL1283 | | |
| Ambient temp. | -25 up to 55 Deg.C | | |


fig.1

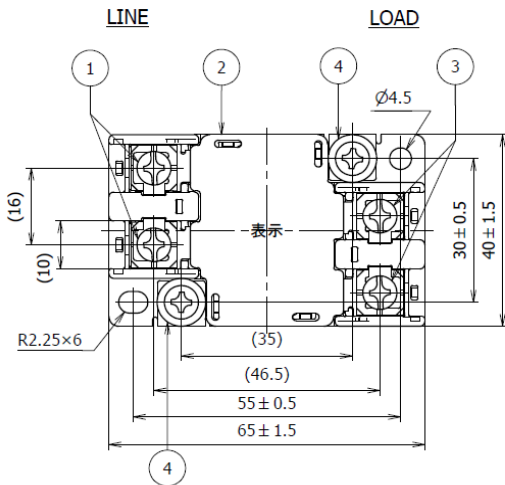


| No | 名称 Part name | 仕様 Specification | 備考 Note |
|----|-------------------------|---------------------|----------------------------|
| 1 | 入力端子 Input terminal | M4 | ねじ脱落防止構造 保証締付トルク:1.2N·m |
| 2 | ケース Case | | |
| 3 | 出力端子 Output terminal | M4 | ねじ脱落防止構造 保証締付トルク:1.2N·m |
| 4 | アース端子 Earth terminal | M4 | 保証締付トルク:1.2N·m |


 表示例
 Example of Markings

 印字方法
 Printing method
 レーザーマーカ 又は ラベル
 Laser marker or label
 Model name (品名)
 Rated voltage and current
 (定格電圧および定格電流)
 Rated frequency
 (定格周波数)
 Lot No. (ロットNo.)

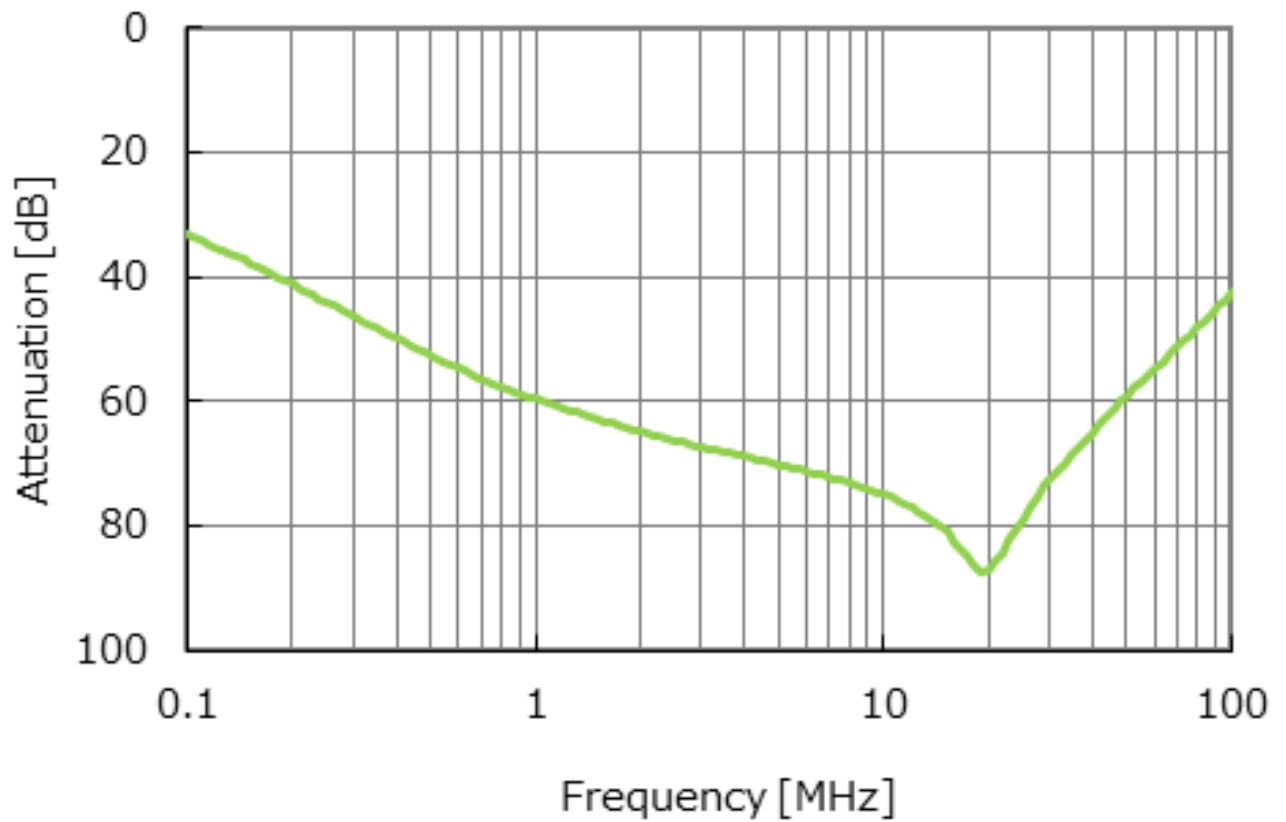代表特性(10A)

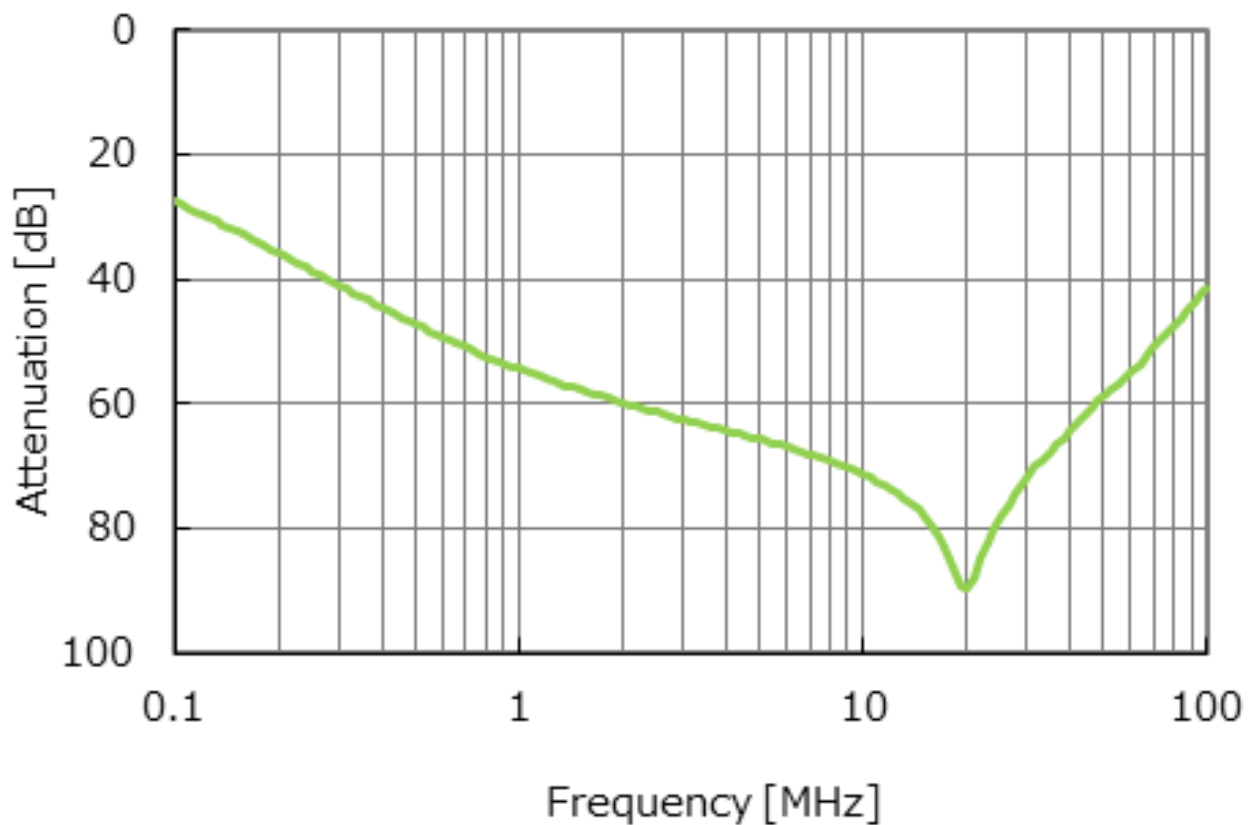

代表特性(20A)



回路图

