

NF3000C-DxA Series (RoHS 対応品)

三相3線式 500VAC

小型高機能



EN60939 (file No.R50533131)
UL60939 (file No.TU50533135 TUVus)
CSA C22.2 No.8 (file No.CA72225176 cTUV)


用途

半導体製造装置、工作機械、汎用インバータ、サーボ等の応用装置、CVCF等の電源装置など


仕様

Part No.	Rated Current	Weight	
NF3010C-DxA	10A	0.7kg	fig.1
NF3020C-DxA	20A		
NF3030C-DxA	30A		
NF3040C-DxAM	40A		
NF3050C-DxAM	50A		
Rated Voltage	500VAC		
Leakage Current	0.3mA max 500VAC 60Hz (By IEC60939-3) 3.3mA max 500VAC 60Hz (By UL60939-3)		
Ambient temp.	-20 up to 50 Deg.C		

fig.1

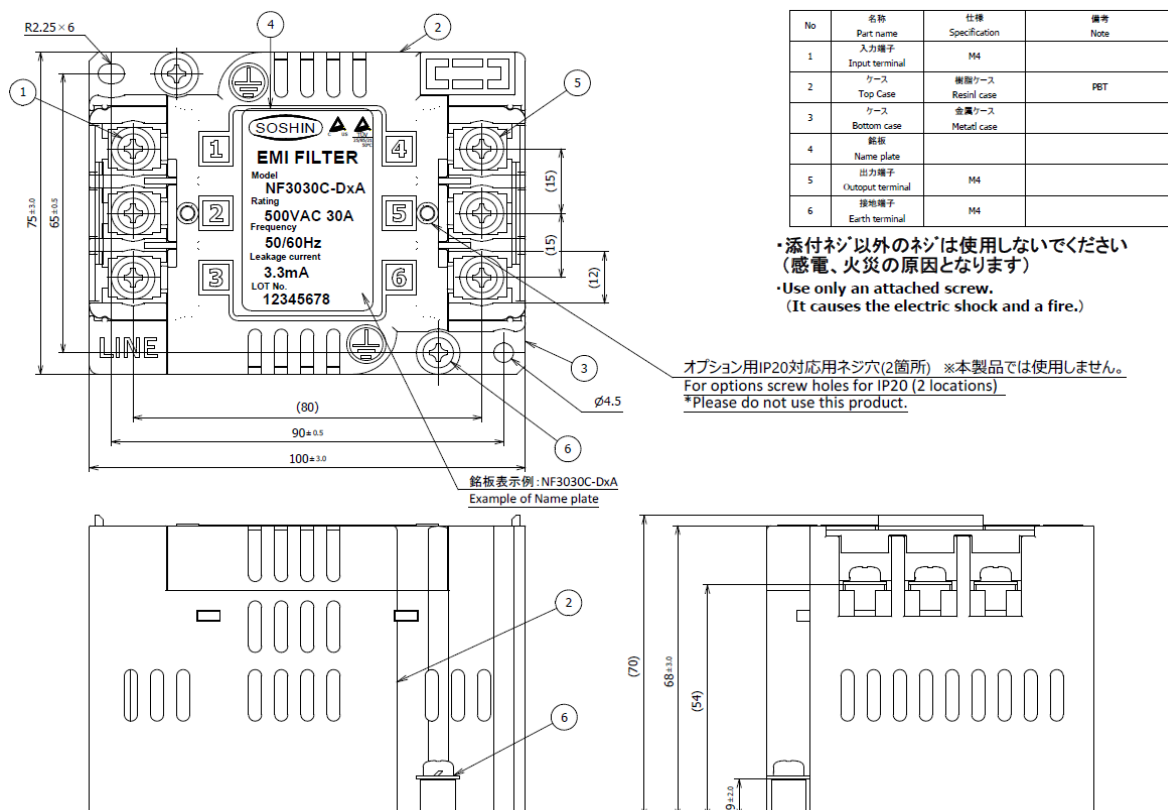

代表特性 (30A)

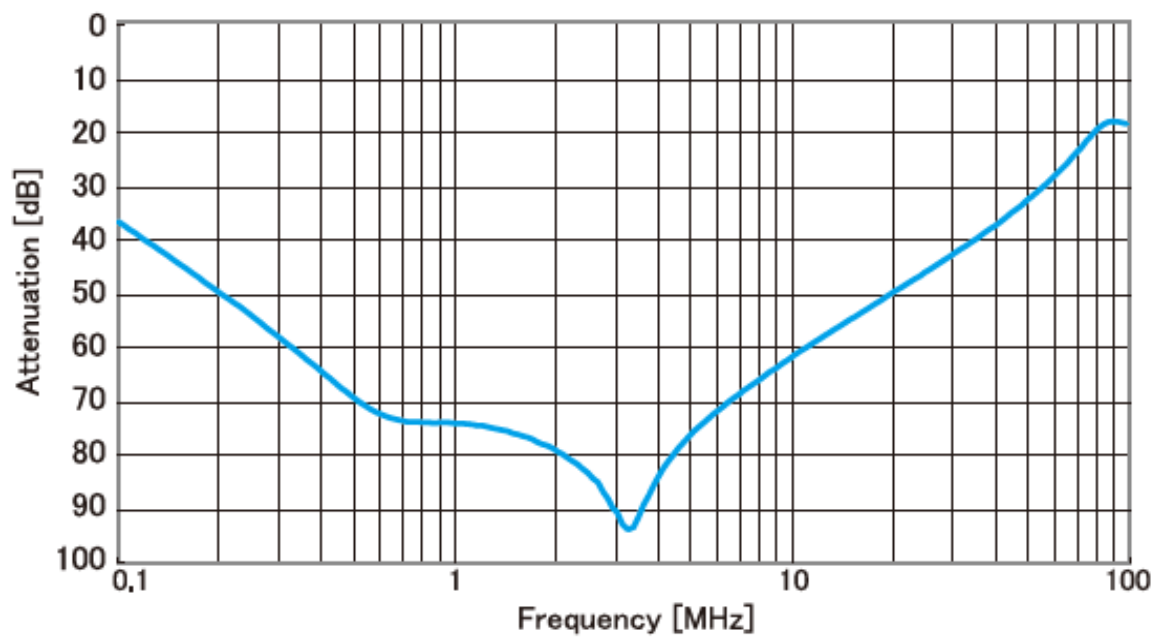

回路図

