

NF2000A-RQ Series (RoHS 対応品)

単相2線式 250VAC

80-250A シリーズ化、単相の汎用タイプ
80-150A はUL/TUV認定品Type Approved
Safety
Regular Production
Surveillancewww.tuv.com
ID 2000000000

80-150A UL1283 (file No.E102708)

80-150A EN60939-2 (file No.R50031727)

用途

UPS、汎用インバータ電源

仕様

Part No.	Rated Current	Weight	Dimensions [mm]														
			A	B	C	D	E	F	G	H	J	K	L	M	N	P	
NF2080A-RQ	80A	4.5Kg	205	180	165	150	120	90	28.5	90	20	63	R2.75 L7	dia.5.5	M8	M6	fig1
NF2100A-RQ	100A	7.5Kg	205	180	165	150	120	90	28.5	90	20	63	R2.75 L7	dia.5.5	M8	M6	
NF2150A-RQ	150A	16Kg	255	230	215	200	170	140	28.5	130	20	103	R3.25 L8	dia.6.5	M8	M6	
NF2200A-RQ	200A	18Kg	420	400	310	100	170	210	7	155	115	M10	M8				fig2
NF2250A-RQ	250A	20Kg	420	400	310	100	170	210	7	155	115	M10	M8				
Rated Voltage	250VAC																
Leakage Current	1.5mA																

fig.1 (80~150A)


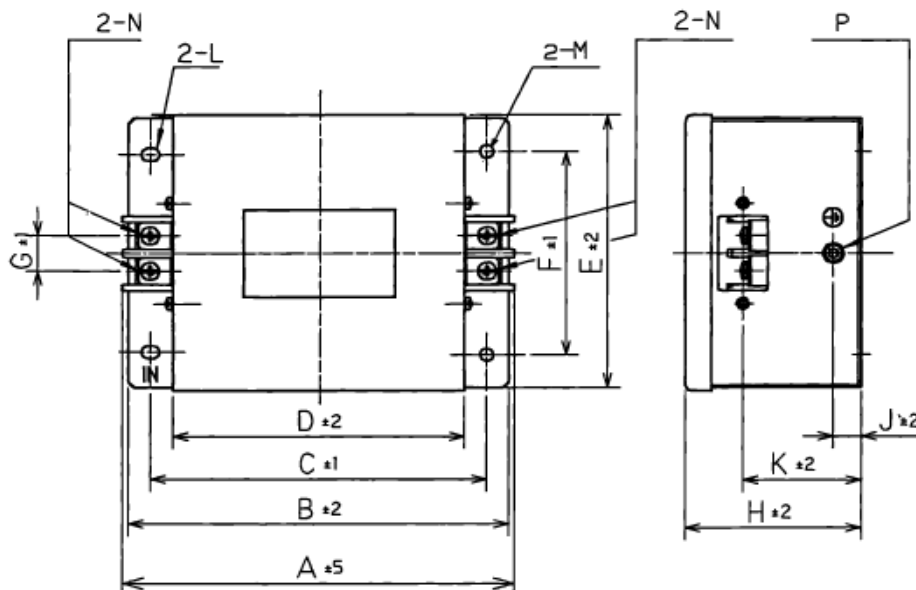


fig. 2 (200, 250A)



代表特性

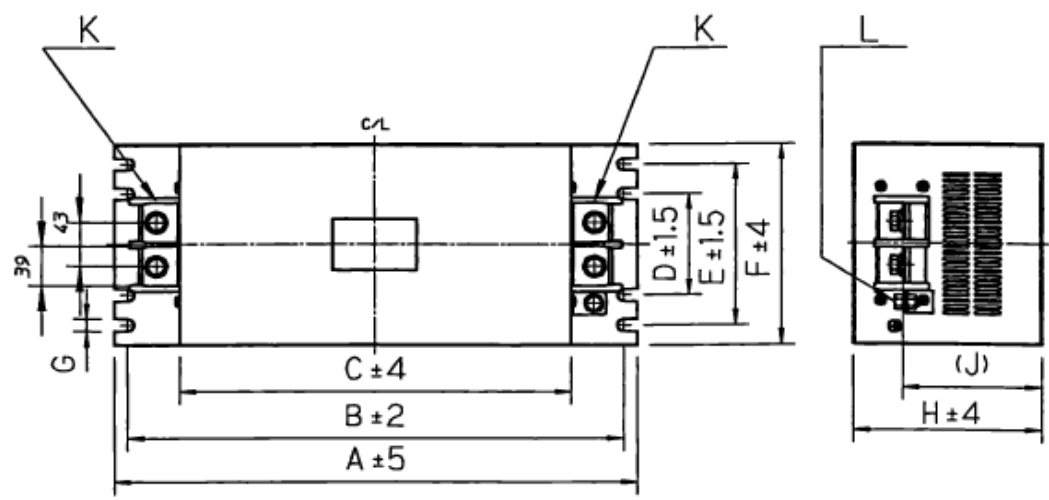