

# CLP3MHz-2786 For Oversampling (Fsx2)


## 用途

映像入出力用

## 性能

<b>CLP3MHz-2786</b>	
Zin/Zout	470 ohm (Unbaranced)
Insertion Loss	1.0+/-0.1dB max (at 200KHz)
Pass Band Ripple	+/-0.15dB max (0.1 up to 3MHz)
Attenuation	20dB min (at 6.75MHz)
	40dB min (10.5 up to 15MHz)
Group Delay	183+/-10ns max (0.1 up to 3MHz)

## 形状寸法

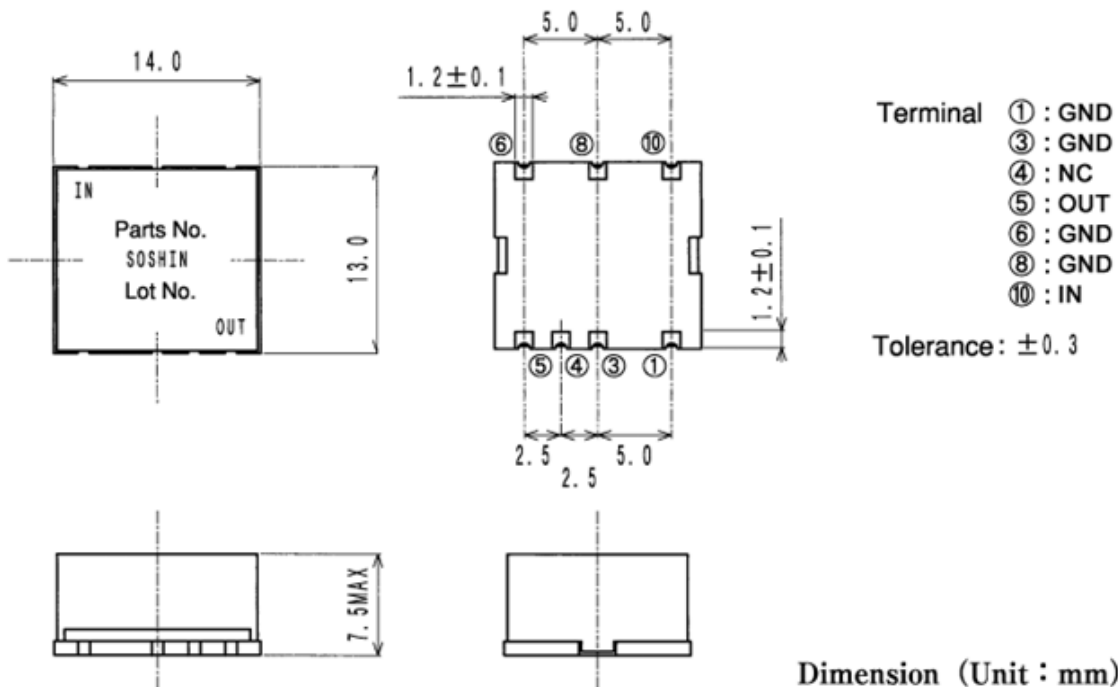

## 代表特性

