

Control No.: ARP-4015800-A


Issued on January 6, 2023



# **RoHS Compliant Part**



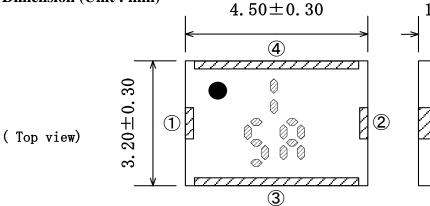



②	Output
③	GND
④	GND
Ter a	minal Dimensions 0.225Typ.

0.200Typ. 0.200Typ.

<u>Terminal</u> Input

(Side view)

3. Electrical characteristics

\* Specification is subject to change.

specification is subject to change:							
Pass band	+25 deg C.	Typical	Unit	Remark			
Nominal impedance	50	=	ohm				
Pass band frequency	5170-5330	=	MHz				
Insertion Loss	2.50 Max.	2.14	dB				
Ripple	1.50 Max.	1.23	dB				
V.S.W.R. in pass band	2.00 Max.	1.42	-				

Attenuation		+25 deg C.	Typical	Unit	Remark	
2400 MHz	-	2500 MHz	30 Min.	33	dB	
5490 MHz	-	5835 MHz	40 Min.	45	dB	
10340 MHz	-	10660 MHz	20 Min.	43	dB	

#### 4. Note

4.1 Operating Temperature Range

: -40 to +100 deg C. : -20 to +35 deg C.

4.2 Storage Temperature Range before soldering in taping package

: 1000 pcs (per reel, per bag)

4.3 Standard Reel Quantity4.4 Max input power Level


: 5W

Approved by	Confirmed by	Raised by
Y. Imai	S.Suzuki	M.Kawano

Control No.: ARP-4015800-A


Issued on

January 6, 2023




Specification

# Measured Data

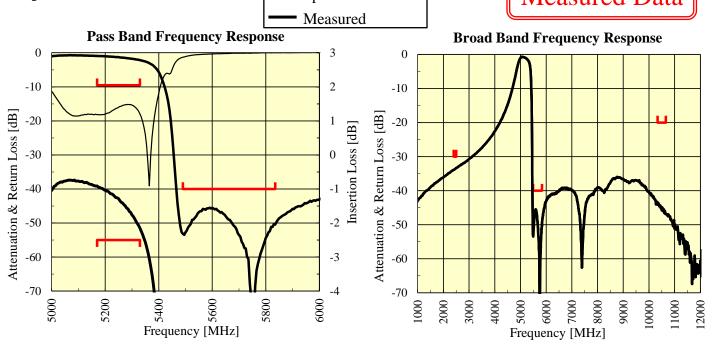


### 6. Recommended Land Pattern

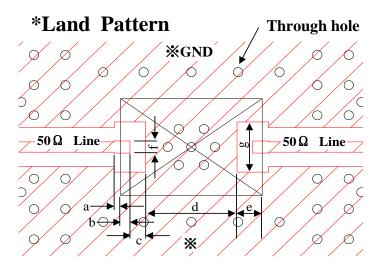

- 0.200 mm
- 0.300 mm
- 0.500 mm
- d 2.900 mm
- 0.800 mm
- 0.400 mm
- 1.660 mm

### \*Resist Pattern

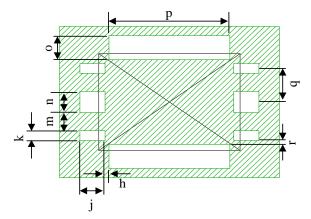

- 0.125 mm
- 0.700 mm
- $0.800 \; \text{mm}$
- 0.800 mm
- 0.325 mm  $0.600 \; \text{mm}$
- 3.850 mm 1.113 mm
- 0.125 mm

Control No.: ARP-4015800-A

3


Issued on January 6, 2023

### 7. Packing method


### 7. 1 Taping conditions

Taping conditions are shown below. Refer to IEC60286-3

- (1) Tape must be wound clockwise with the feeding hole coming to the right hand side.
- (2) Top cover tape must not cover feeding holes of carrier tape and/or show out of carrier tape.
- (3) A blank section carrying no chips of a length of 160mm min. on ending section and 100mm min. on leading section must be provided.
- (4) A leading section of 400mm min. must be provided on top cover tape.

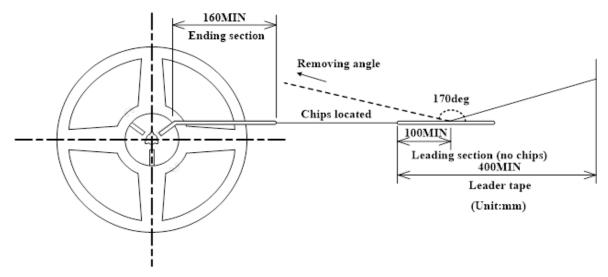

- (5) To end tape winding, the leading section of top cover tape must be stuck on a side of a reel with adhesive tape.
- (6) Removing force of top cover tape in the unwinding with an angle of 170 degrees between the removed side of a reel and carrier tape must be 0.1 to 1.0N.
- (7) When the embossed tape is turned upside down with the sealing tape peeled off, the filter body inside of the tape must fall off and the mounter must not cause a take-up mistake.
- (8) A sticker carrying Soshin product №, quantity, lot №, inspection date is to be placed on the specified side of reels. And Lot No. means our production control number. The shipment records are available if requested.

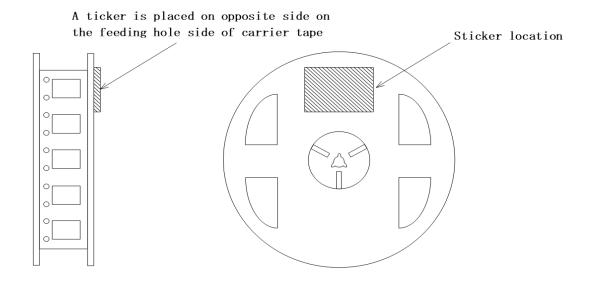


Control No.: ARP-4015800-A

Issued on


January 6, 2023

4

(9) Product orientation must be consistent. Products must not be positioned out of the mounting location.

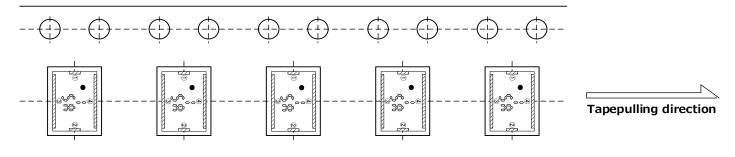

- (10) A taping reel must be sealed in a plastic bag, individually.
- (11) Tape-packaged quantity The quantity is 1000 pcs per single tape-package as a rule.
- **Dimensions of the carrier tape (Unit: mm)**

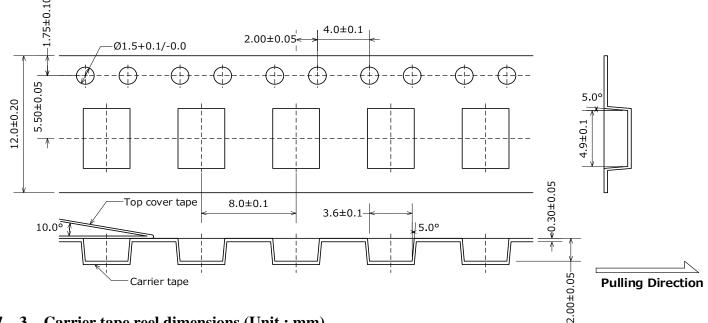

**Carrier tape reel dimensions (Unit: mm)** 

